



This Datasheet is for the

1756-OB16

Buy new or used ALLEN-BRADLEY / Rockwell Automation 1756-OB16 or 1756OB16
ControlLogix ControlLogix DC Digital Output Module 16 Diagnostic Outputs (8
points/group) 24V DC Source

<http://www.qualitrol.com/shop/p-16378-1756-ob16.aspx>

For further information, please contact Qualitrol Technical Support at

1-800-784-9385

support@qualitrol.com

ControlLogix Selection Guide



[1756 ControlLogix I/O Modules](#)

[1756 ControlLogix Integrated Motion](#)

[1756 ControlLogix Communication Modules](#)

[1756 ControlLogix Controllers](#)

[1756 ControlLogix Chassis](#)

[1756 ControlLogix Power Supplies](#)

Logix Controllers Comparison

| Characteristic | 1756 ControlLogix | 1756 GuardLogix | 1768 CompactLogix | 1769-L3x CompactLogix | 1769-L23x CompactLogix | 1789 SoftLogix5800 | PowerFlex 700S Phase 2 with DriveLogix |
|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Controller tasks: | <ul style="list-style-type: none"> 32 tasks 100 programs/task | <ul style="list-style-type: none"> 32 tasks 100 programs/task | <ul style="list-style-type: none"> 16 tasks | <ul style="list-style-type: none"> 1769-L35: 8 tasks 1769-L32: 6 tasks 1769-L31: 4 tasks | <ul style="list-style-type: none"> 3 tasks 4 programs total | <ul style="list-style-type: none"> 32 tasks 100 programs/task | <ul style="list-style-type: none"> 8 tasks Event tasks: axis and motion event triggers |
| <ul style="list-style-type: none"> Continuous Periodic Event | <ul style="list-style-type: none"> Event tasks: all event triggers | <ul style="list-style-type: none"> Event tasks: all event triggers | <ul style="list-style-type: none"> Event tasks: consumed tag, EVENT instruction, axis, and motion event triggers | <ul style="list-style-type: none"> Event tasks: | <ul style="list-style-type: none"> Event tasks: all event triggers, plus outbound and Windows events | | |


| | | | | | | | |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | | | consumed tag and EVENT instruction triggers | consumed tag and EVENT instruction triggers | | |
| User memory | 1756-L61: 2 MB 1756-L62: 4 MB 1756-L63: 8 MB 1756-L64: 16 MB 1756-L65: 32 MB | 1756-L61S: 2 MB Standard 1 MB Safety 1756-L62S: 4 MB Standard 1 MB Safety | 1768-L43: 2 MB 1768-L45: 3 MB | 1769-L31: 512 KB 1769-L32x: 750 KB 1769-L35x: 1.5 MB | 512 KB | 1789-L10: 2 MB; 1 controller; no motion 1789-L30: 64 MB; 3 controllers 1789-L60: 64 MB; 6 controllers | 1.5 MB |
| Nonvolatile user memory | CompactFlash | CompactFlash | CompactFlash | CompactFlash | None | None | CompactFlash |
| Built-in communication ports | 1 port RS-232 serial | 1 port RS-232 serial | 1 port RS-232 serial | <ul style="list-style-type: none"> • 1769-L31: 2 RS-232 ports • 1769-L32C, 1769-L35CR: 1 ControlNet port and 1 RS-232 serial port • 1769-L32E, 1769-L35E: 1 EtherNet/IP port and 1 RS-232 serial port | <ul style="list-style-type: none"> • 1769-L23E-QB1B: 1 EtherNet/IP port and 1 RS-232 serial port • 1769-L23-QBFC1B: 2 RS-232 serial ports | Depends on personal computer | 1 port RS-232 serial |
| Communication options | <ul style="list-style-type: none"> • EtherNet/IP • ControlNet • DeviceNet • Data Highway Plus • Remote I/O • SynchLink | <ul style="list-style-type: none"> • EtherNet/IP (standard and safety) • ControlNet (standard and safety) • DeviceNet (standard and safety) • Data Highway Plus • Remote I/O • SynchLink | <ul style="list-style-type: none"> • EtherNet/IP • ControlNet • DeviceNet | <ul style="list-style-type: none"> • EtherNet/IP • ControlNet • DeviceNet | <ul style="list-style-type: none"> • EtherNet/IP • DeviceNet | <ul style="list-style-type: none"> • EtherNet/IP • ControlNet • DeviceNet | <ul style="list-style-type: none"> • EtherNet/IP • ControlNet • DeviceNet |
| Serial port communication | <ul style="list-style-type: none"> • ASCII • DF1 full/half-duplex • DF1 radio modem • DH-485 • Modbus via logic | <ul style="list-style-type: none"> • ASCII • DF1 full/half-duplex • DF1 radio modem • DH-485 • Modbus via logic | <ul style="list-style-type: none"> • ASCII • DF1 full/half-duplex • DF1 radio modem • DH-485 • Modbus via logic | <ul style="list-style-type: none"> • ASCII • DF1 full/half-duplex • DF1 radio modem • DH-485 • Modbus via logic | <ul style="list-style-type: none"> • ASCII • DF1 full/half-duplex • DF1 radio modem • DH-485 • Modbus via logic | <ul style="list-style-type: none"> • ASCII • DF1 full/half-duplex • DH-485 • Modbus via logic | <ul style="list-style-type: none"> • ASCII • DF1 full/half-duplex • DF1 radio modem • DH-485 • Modbus via logic |
| Controller connections | 250 | 250 | 250 | 100 | 100 | 250 | 100 |
| Network connections | Per network module: <ul style="list-style-type: none"> • 100 ControlNet (CN2/A) • 40 ControlNet (CNB) • 256 EtherNet/IP; 128 TCP (EN2x) • 128 EtherNet/IP; 64 TCP (ENBT) | Per network module: <ul style="list-style-type: none"> • 100 ControlNet (CN2/A) • 40 ControlNet (CNB) • 256 EtherNet/IP; 128 TCP (EN2x) • 128 EtherNet/IP; 64 TCP (ENBT) | Per network module: <ul style="list-style-type: none"> • 48 ControlNet • 64 EtherNet/IP; 32 TCP | Per controller: <ul style="list-style-type: none"> • 32 ControlNet • 32 EtherNet/IP; 32 TCP | Per controller: <ul style="list-style-type: none"> • 32 EtherNet/IP; 8 TCP | Per network module: <ul style="list-style-type: none"> • 48 ControlNet • 128 EtherNet/IP; 64 TCP | Per network module: <ul style="list-style-type: none"> • 32 ControlNet • 32 EtherNet/IP; 32 TCP |
| Controller redundancy | Full support | None | Backup via DeviceNet | Backup via DeviceNet | Backup via DeviceNet | N/A | N/A |

| | | | | | | | |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Simple motion | <ul style="list-style-type: none"> • Stepper • Servo via DeviceNet • Analog or networked AC drive | <ul style="list-style-type: none"> • Stepper • Servo via DeviceNet • Analog or networked AC drive | <ul style="list-style-type: none"> • Stepper • Servo via DeviceNet • Analog or networked AC drive | <ul style="list-style-type: none"> • Stepper • Servo via DeviceNet • Analog or networked AC drive | <ul style="list-style-type: none"> • Stepper • Servo via DeviceNet • Analog or networked AC drive | <ul style="list-style-type: none"> • Stepper • Servo via DeviceNet • Analog or networked AC drive | <ul style="list-style-type: none"> • Stepper • Servo via DeviceNet • Analog or networked AC drive |
| Integrated motion | <p>SERCOS interface</p> <p>Analog options:</p> <ul style="list-style-type: none"> • Encoder input • LDT input • SSI input | <p>SERCOS interface</p> <p>Analog options:</p> <ul style="list-style-type: none"> • Encoder input • LDT input • SSI input | SERCOS interface | N/A | N/A | <p>SERCOS interface</p> <p>Analog encoder input</p> | <ul style="list-style-type: none"> • 1 full servo • 1 feedback axis |
| Programming languages | <ul style="list-style-type: none"> • Relay ladder • Structured text • Function block • SFC | <ul style="list-style-type: none"> • Relay ladder • Structured text • Function block • SFC | <ul style="list-style-type: none"> • Relay ladder • Structured text • Function block • SFC | <ul style="list-style-type: none"> • Relay ladder • Structured text • Function block • SFC | <ul style="list-style-type: none"> • Relay ladder • Structured text • Function block • SFC | <ul style="list-style-type: none"> • Relay ladder • Structured text • Function block • SFC • External routines (developed in C/C++) | <ul style="list-style-type: none"> • Relay ladder • Structured text • Function block • SFC |

**Select a ControlLogix
System**


1756 ControlLogix System



Step 1
[ControlLogix I/O Modules](#)

[Page 7](#)

Select:

- I/O modules - some modules have field-side diagnostics, electronic fusing, or individually isolated inputs/outputs
- A remote terminal block (RTB) or wiring system for each I/O module

Step 2
[ControlLogix Integrated Motion Modules](#)

[Page 15](#)

Select:

- A SERCOS or analog interface module
- Associated cables
- A removable terminal block (RTB) - only for analog interface modules
- Select drives, motors, and accessories (use the Motion Analyzer software)

Step 3
[ControlLogix Communication Modules](#)

[Page 18](#)

Select:


- Networks
- Communication modules
- Associated cables and network equipment
- Sufficient modules and cables if you are planning a redundant system

Step 4
[ControlLogix Controllers](#)

[Page 33](#)


Select:

- A controller with sufficient memory
- CompactFlash card
- Replacement batteries

Step 5
[ControlLogix Chassis](#)

[Page 38](#)

Select:

- A chassis with sufficient slots
- Slot fillers for empty slots


Step 6
[ControlLogix Power Supplies](#)

[Page 40](#)

Select:

- One power supply for each chassis, if you are using standard power supplies
- A power supply bundle if you are planning a redundant power supply system

Optional Step
[Visualization Products](#)

[Page 42](#)

Optional Step
[Programming Software](#)

[Page 43](#)


ControlLogix System Overview

The ControlLogix system provides discrete, drives, motion, process, and safety control together with communication and state-of-the-art I/O in a small, cost-competitive package. The system is modular, so you can design, build, and modify it efficiently with significant savings in training and engineering.

Example Configuration - ControlLogix System

A simple ControlLogix system consists of a standalone controller and I/O modules in a single chassis. For a more comprehensive system, use:

- multiple controllers in a single chassis.
- multiple controllers joined across networks.
- I/O in multiple platforms that are distributed in many locations and connected over multiple I/O links.

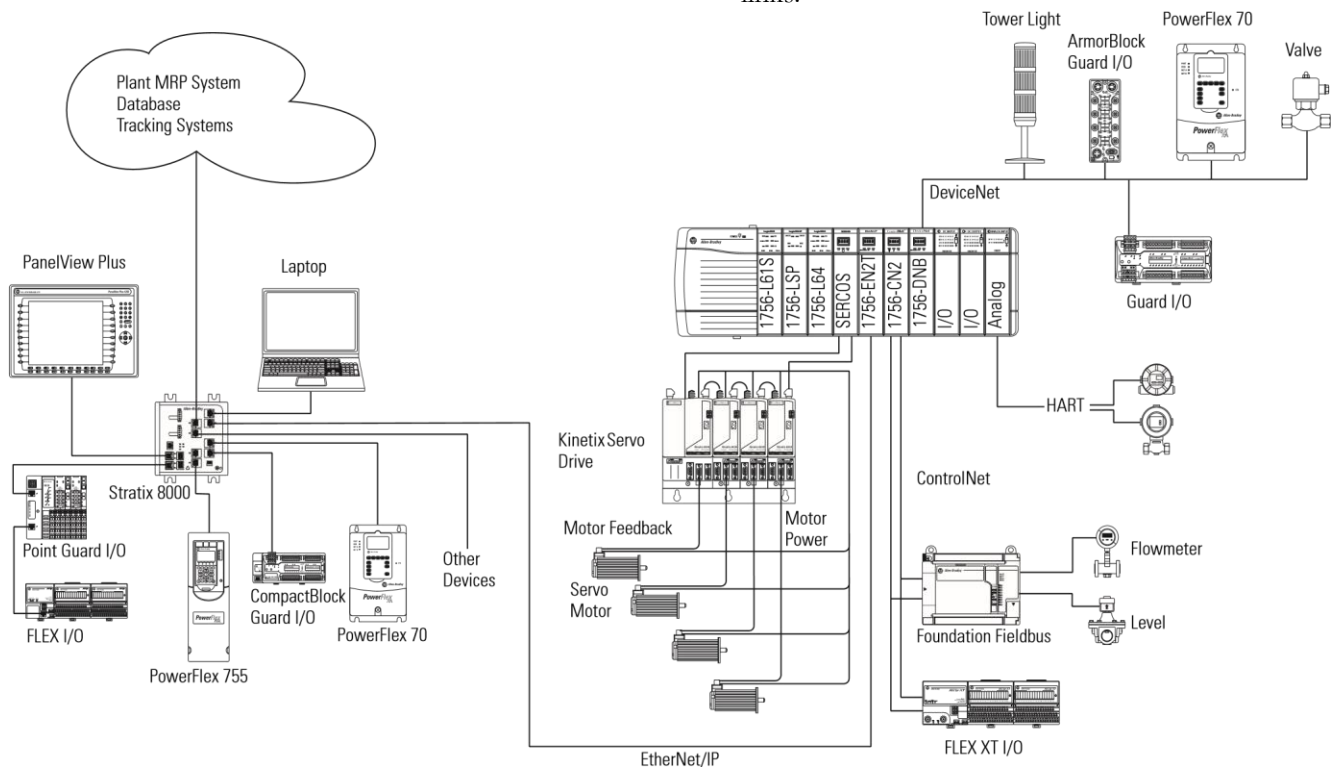

ControlLogix-XT System

The ControlLogix-XT controllers function in the same way as the traditional ControlLogix controllers. The ControlLogix-XT products include control and communication system components that, when used with FLEX I/O-XT products, provide a complete control system solution that can be used in environments where temperatures range from -20...70 °C (-4...158 °F).

When used independently, the ControlLogix-XT system can withstand environments where the temperature ranges from -25...70 °C (-13...158 °F).

GuardLogix Safety System


A GuardLogix controller is a ControlLogix controller that also provides safety control. The GuardLogix system is a dual controller solution — you must use a 1756-L6xS primary controller and a 1756-LSP safety partner to achieve SIL 3/CAT. 4. A major benefit of this system is that it's still a single project, safety and standard together. The safety partner controller is a part of the system, is automatically configured, and requires no user setup.

| Application | Description |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SIL 3 | <p>The GuardLogix controller system is type-approved and certified for use in safety applications up to and including SIL 3 according to IEC 61508, and applications up to and including category (CAT) 4, according to EN954-1. For more information, see:</p> <ul style="list-style-type: none"> • GuardLogix Controllers Systems Safety Reference Manual, publication 1756-RM093. • GuardLogix Controllers User Manual, publication 1756-UM020. • GuardLogix Safety Application Instruction Set Reference Manual, publication 1756-RM095. |
| SIL 2 | <p>Components of the ControlLogix system are type-approved and certified for use in SIL 2 applications, according to IEC 61508, and AK4 applications according to DIN V19250. For a list of ControlLogix system components that meet SIL 2 requirements, see Using ControlLogix in SIL 2 Applications Safety Reference Manual, publication 1756-RM001.</p> |

Example Configuration - Redundant ControlLogix

System The ControlLogix controller supports controller


redundancy.

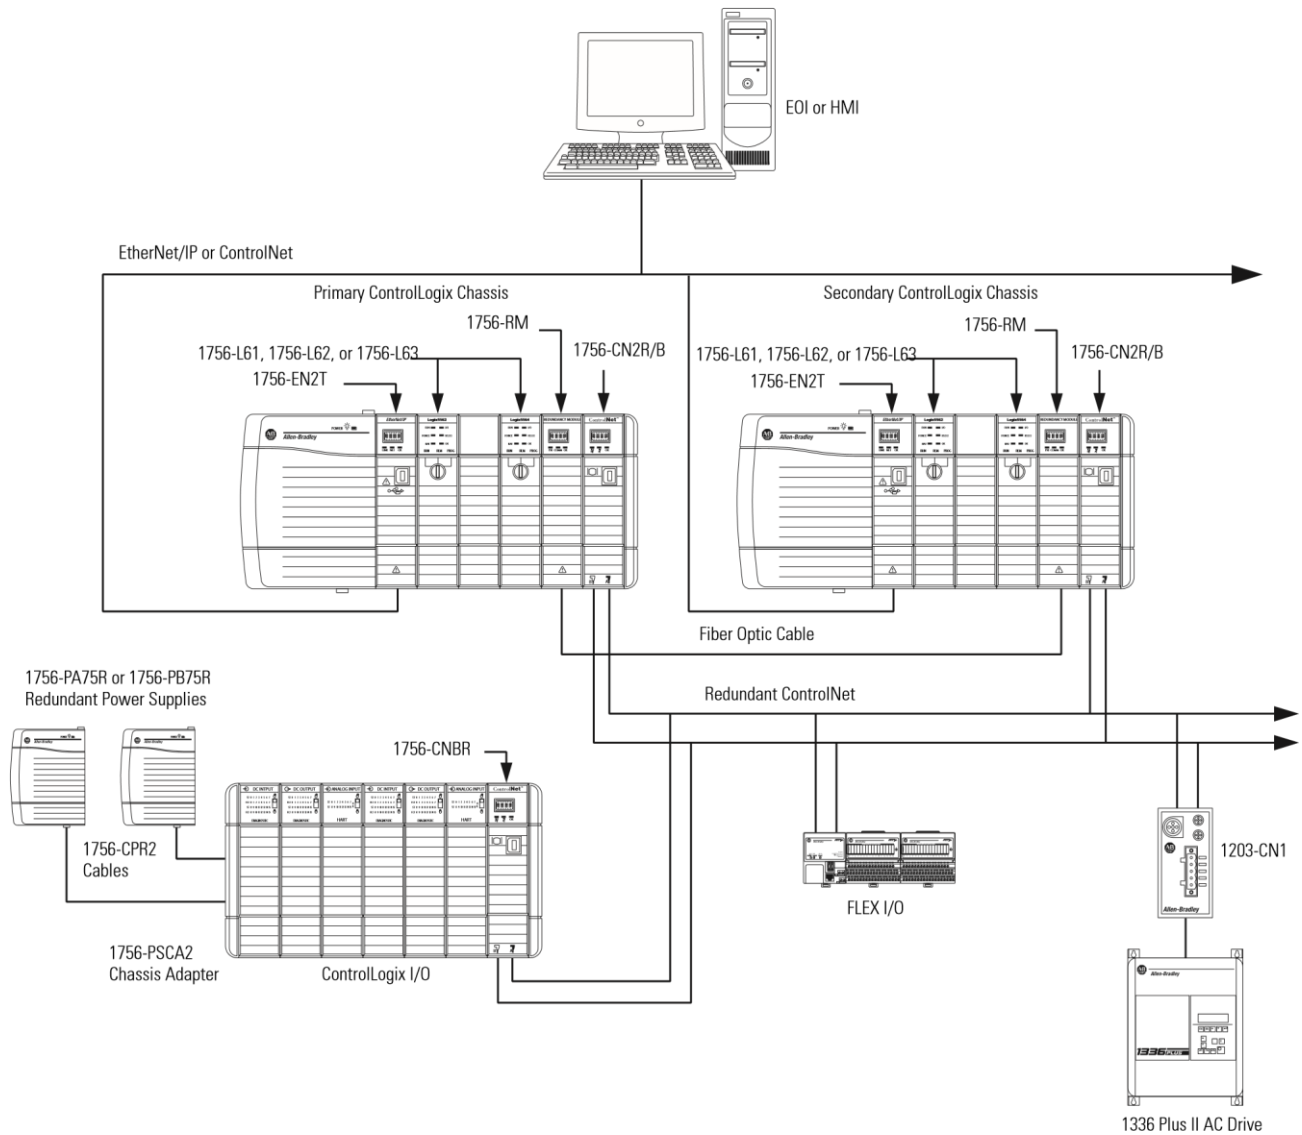

ControlLogix I/O Modules

The ControlLogix architecture provides a wide range of input and output

modules to span many applications, from high-speed digital to process control. The ControlLogix architecture uses Producer-Consumer technology, which allows input information and output status to be shared among multiple ControlLogix controllers.

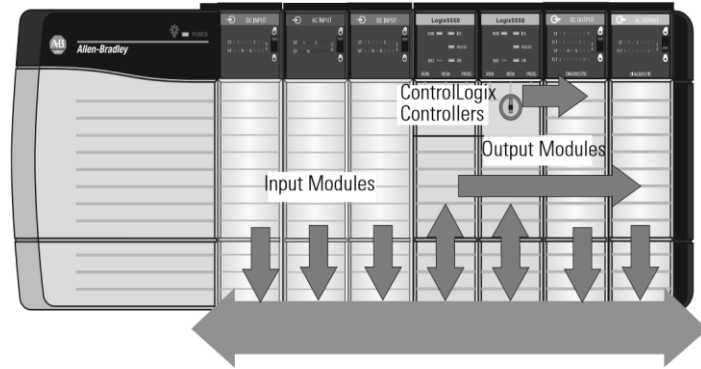

Each ControlLogix I/O module mounts in a ControlLogix chassis and **requires** either a removable terminal block (RTB) or a 1492 interface module (IFM) to connect all field-side wiring. RTBs and IFMs are not included with the I/O modules. They must be ordered separately.

For detailed specifications, see 1756 ControlLogix I/O Modules Specifications, publication [1756-TD002A-EN-P](#).

AC Digital Input Modules

| Cat. No. | Inputs/Outputs | Voltage Category | Operating Voltage Range | Removable Terminal Block |
|------------|---------------------------------------|------------------|-------------------------|--------------------------|
| 1756-IA8D | 8 diagnostic inputs (4 points/group) | 120V AC | 79...132V AC | 1756-TBNH 1756-TBSH |
| 1756-IA16 | 16 inputs (8 points/group) | 120V AC | 74...132V AC | 1756-TBNH 1756-TBSH |
| 1756-IA16I | 16 individually isolated inputs | 120V AC | 74...132V AC | 1756-TBCH 1756-TBS6H |
| 1756-IA32 | 32 diagnostic inputs (4 points/group) | 120V AC | 74...132V AC | 1756-TBCH 1756-TBS6H |
| 1756-IM16I | 16 individually isolated inputs | 240V AC | 159...265V AC | 1756-TBCH 1756-TBS6H |
| 1756-IN16 | 16 inputs (8 points/group) | 24V AC | 10...30V AC | 1756-TBNH 1756-TBSH |

AC Digital Output Modules

| Cat. No. | Inputs/Outputs | Voltage Category | Operating Voltage Range | Removable Terminal Block |
|------------|-------------------------------------------------------------------------|------------------|------------------------------------------------------------------|--------------------------|
| 1756-OA8 | 8 outputs (4 points/group) | 120/240V AC | 79...265V AC | 1756-TBNH 1756-TBSH |
| 1756-OA8D | 8 diagnostic, electronically fused outputs (4 points/group) | 120V AC | 74...132V AC | 1756-TBNH 1756-TBSH |
| 1756-OA8E | 8 electronically fused outputs (4 points/group) | 120V AC | 74...132V AC | 1756-TBNH 1756-TBSH |
| 1756-OA16 | 16 mechanically fused/group outputs (8 points/group) | 120/240V AC | 74...265V AC | 1756-TBNH 1756-TBSH |
| 1756-OA16I | 16 individually isolated outputs | 120/240V AC | 74...265V AC | 1756-TBCH 1756-TBS6H |
| 1756-ON8 | 8 outputs (4 points/group) | 24V AC | 10...30V AC, current >50 mA 16...30V AC, current <50 mA | 1756-TBNH 1756-TBSH |

DC Digital Input Modules

| Cat. No. | Inputs/Outputs | Voltage Category | Operating Voltage Range | Removable Terminal Block |
|---------------|-----------------------------------------------------------|--------------------------------|--------------------------------------------|--------------------------|
| 1756-IB16 | 16 inputs (8 points/group) | 12/24V DC sink | 10...31.2V DC | 1756-TBNH 1756-TBSH |
| 1756-IB16D | 16 diagnostic inputs (4 points/group) | 12/24V DC sink | 10...30V DC | 1756-TBCH 1756-TBS6H |
| 1756-IB16I | 16 individually isolated inputs | 12/24V DC sink/source | 10...30V DC | 1756-TBCH 1756-TBS6H |
| 1756-IB16ISOE | 16 individually isolated, sequence of events inputs | 24/48V DC sink/source | 10...55V DC | 1756-TBCH 1756-TBS6H |
| 1756-IC16 | 16 inputs (8 points/group) | 48V DC sink | 30...55V DC @ 60 °C 30...60V DC @ 55 °C | 1756-TBNH 1756-TBSH |
| 1756-IG16 | 16 inputs (8 points/group) | 5V DC TTL source (Low=True) | 4.5...5.5V DC | 1756-TBNH 1756-TBSH |
| 1756-IH16I | 16 individually isolated inputs | 125V DC sink/source | 90...146V DC | 1756-TBCH 1756-TBS6H |

Select a ControlLogix System

| | | | | |
|---------------|-----------------------------------------------------|---------------------|--------------|-------------------------|
| 1756-IH16ISOE | 16 individually isolated, sequence of events inputs | 125V DC sink/source | 90...140V DC | 1756-TBCH 1756-TBS6H |
| 1756-IV16 | 16 inputs (8 points/group) | 12/24V DC source | 10...30V DC | 1756-TBNH 1756-TBSH |
| 1756-IV32 | 32 inputs (16 points/group) | 12/24V DC source | 10...30V DC | 1756-TBCH 1756-TBS6H |

8

DC Digital Output Modules

| Cat. No. | Inputs/Outputs | Voltage Category | Operating Voltage Range | Removable Terminal Block |
|-------------|---------------------------------------------------------|-----------------------------|-------------------------|--------------------------|
| 1756-OB8 | 8 outputs | 12/24V DC source | 10...30V DC | 1756-TBCH 1756-TBS6H |
| 1756-OB8EI | 8 electronically fused, individually isolated outputs | 12/24V DC source | 10...30V DC | 1756-TBCH 1756-TBS6H |
| 1756-OB8I | 8 individually isolated outputs | 12/24V DC source | 10...30V DC | 1756-TBCH 1756-TBS6H |
| 1756-OB16D | 16 diagnostic outputs (8 points/group) | 24V DC source | 19.2...30V DC | 1756-TBCH 1756-TBS6H |
| 1756-OB16E | 16 electronically fused outputs (8 points/group) | 12/24V DC source | 10...31.2V DC | 1756-TBNH 1756-TBSH |
| 1756-OB16I | 16 individually isolated outputs | 12/24V DC sink/source | 10...30V DC | 1756-TBCH 1756-TBS6H |
| 1756-OB16IS | 16 individually isolated outputs 8 scheduled outputs | 12/24V DC sink/source | 10...30V DC | 1756-TBCH 1756-TBS6H |
| 1756-OB32 | 32 outputs (16 points/group) | 12/24V DC source | 10...31.2V DC | 1756-TBCH 1756-TBS6H |
| 1756-OC8 | 8 outputs (4 points/group) | 48V DC source | 30...60V DC | 1756-TBNH 1756-TBSH |
| 1756-OG16 | 16 (8 points/group) | 5V DC TTL source (Low=True) | 4.5...5.5V DC | 1756-TBNH 1756-TBSH |
| 1756-OH8I | 8 outputs individually isolated | 120V DC | 90...146V DC | 1756-TBCH 1756-TBS6H |
| 1756-OV16E | 16 electronically fused outputs (8 points/group) | 12/24V DC sink | 10...30V DC | 1756-TBNH 1756-TBSH |

| | | | | |
|------------|---------------------------------------------------|----------------|-------------|-------------------------|
| 1756-OV32E | 32 electronically fused outputs (16 points/group) | 12/24V DC sink | 10...30V DC | 1756-TBCH 1756-TBS6H |
|------------|---------------------------------------------------|----------------|-------------|-------------------------|

Contact Output Modules

| Cat. No. | Inputs/Outputs | Operating Voltage Range | Removable Terminal Block |
|------------|-----------------------------------------------------------------------------------------|-----------------------------|--------------------------|
| 1756-OW16I | 16 normally open, individually isolated outputs | 5...150V DC 10...265V AC | 1756-TBCH 1756-TBS6H |
| 1756-OX8I | 8 normally open 8 normally closed, individually isolated outputs (2 points/group) | 5...150V DC 10...265V AC | 1756-TBCH 1756-TBS6H |

Analog Input Modules

| Cat. No. | Inputs/Outputs | Range | Resolution | Removable Terminal Block |
|-------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| 1756-IF6CIS | 6 individually isolated inputs, current sourcing | 0...21 mA | 16 bits 0.34 μ A/bit | 1756-TBNH 1756-TBSH |
| 1756-IF6I | 6 individually isolated inputs | \pm 10.5V 0...10.5V 0...5.25V 0...21 mA | 16 bits 10.5V: 343 μ V/bit 0...10.5V: 171 μ V/bit 0...5.25V: 86 μ V/bit 0...21 mA: 0.34 μ A/bit | 1756-TBNH 1756-TBSH |
| 1756-IF8 | 8 single-ended inputs 4 differential inputs 2 high-speed differential inputs | \pm 10.25V 0...10.25V 0...5.125V 0...20.5 mA | \pm 10.25V: 320 μ V/cnt (15 bits plus sign bipolar) 0...10.25V: 160 μ V/cnt (16 bits) 0...5.125V: 80 μ V/cnt (16 bits) 0...20.5mA: 0.32 μ A/cnt (16 bits) | 1756-TBCH 1756-TBS6H |
| 1756-IF8H | 8 differential voltage or current inputs, HART interface | \pm 10V 0...5V 1...5V 0...10V 0...20 mA 4...20 mA | 16...21 bits | 1756-TBCH 1756-TBS6H |
| 1756-IF16 | 16 single-ended inputs 8 differential or 4 differential (high speed) inputs | \pm 10.5V 0...10.5V 0...5.25V 0...21 mA | 16 bits 10.5V: 343 μ V/bit 0...10.5V: 171 μ V/bit 0...5.25V: 86 μ V/bit 0...21 mA: 0.34 μ A/bit | 1756-TBNH 1756-TBSH |

Analog RTD and Thermocouple Modules

| Cat. No. | Inputs/Outputs | Range | Resolution | Removable Terminal Block |
|----------|----------------|-------|------------|--------------------------|
|----------|----------------|-------|------------|--------------------------|

| | | | | |
|------------|---------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 1756-IR6I | 6 individually isolated RTD inputs | 1...487 Ω 2...1000 Ω 4...2000 Ω 8...4020 Ω | 16 bits 1...487 Ω : 7.7 m Ω /bit 2...1000 Ω :15 m Ω /bit 4...2000 Ω :30 m Ω /bit 8...4020 Ω :60 m Ω /bit | 1756-TBNH 1756-TBSH |
| 1756-IT6I | 6 individually isolated thermocouple inputs 1 CJC | -12...78 mV -12...30 mV | 16 bits -12...78 mV: 1.4 μ V/bit -12...30 mV: 0.7 μ V/bit | 1756-TBNH 1756-TBSH |
| 1756-IT6I2 | 6 individually isolated thermocouple inputs 2 CJC | -12...78 mV (1.4 μ V per bit) -12...30 mV (0.7 μ V per bit – high resolution range) | 16 bits -12...78 mV: 1.4 μ V/bit -12...30 mV: 0.7 μ V/bit | 1756-TBNH 1756-TBSH |

Analog Output Modules

| Cat. No. | Inputs/Outputs | Range | Resolution | Removable Terminal Block |
|------------|----------------------------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------|
| 1756-OF4 | 4 voltage or current outputs | \pm 10.4V 0...21 mA | Voltage: 15 bits across 10.5V, 320 μ V/bit Current: 15 bits across 21mA, 650 nA/bit | 1756-TBNH 1756-TBSH |
| 1756-OF6CI | 6 individually isolated outputs, current | 0...21 mA | 13 bits across 21 mA (2.7 μ A) | 1756-TBNH 1756-TBSH |
| 1756-OF6VI | 6 individually isolated outputs, voltage | \pm 10.5V | 14 bits across 21V (1.3 mV) (13 bits across 10.5V +sign bit) | 1756-TBNH 1756-TBSH |
| 1756-OF8 | 8 voltage or current outputs | \pm 10.4V 0...21 mA | 15 bits across 21 mA - 650 nA/bit 15 bits across 10.4V - 320 μ V/bit | 1756-TBNH 1756-TBSH |
| 1756-OF8H | 8 voltage or current outputs, HART interface | \pm 10.4V 0...20 mA 4...20 mA | 15...16 bits | 1756-TBNH 1756-TBSH |

Analog Combination Input and Output Module

| Cat. No. | Inputs/Outputs | Range | Resolution | Removable Terminal Block |
|----------|----------------|-------|------------|--------------------------|
|----------|----------------|-------|------------|--------------------------|

| | | | | |
|----------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| 1756-IF4FXOF2F | 4 high-speed, sub-millisecond, differential inputs 2 high-speed voltage or current outputs | Input: ± 10.5V 0...10.5V 0...5.25V 0...21 mA Output: ± 10.4V 0...21 mA | Input: Approx. 14 bits across ±10V DC (21V total) ±10V: 1.3 mV/bit, 14-bit effective 0...10.5V: 1.3 mV/bit, 13-bit effective 0...5.25V: 1.3 mV/bit, 12-bit effective Approx. 12 bits across 21 mA 0...21 mA: 5.25 µA/bit Output: 13 bits across 21 mA = 2.8 µA/bit 14 bits across 21.8V = 1.3 mV/bit | 1756-TBCH 1756-TBS6H |
|----------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|

Specialty I/O Modules

| Cat. No. | Inputs/Outputs | Description | Removable Terminal Block |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| 1756-CFM | 4 inputs (2 per channel) 2 outputs, current sourcing | Configurable flow meter module 2 Flowmeter (F) inputs used for all modes 2 Gate inputs used in Totalizer mode for prover/store count | 1756-TBNH 1756-TBSH |
| 1756-HSC | 2 counters, each with 3 inputs (A, B, Z for gate/reset) 4 outputs (2 points/group) | High-speed counter module 5V operation: 4.5...5.5V DC 12/24V operation: 10...31.2V DC | 1756-TBCH 1756-TBS6H |
| 1756-PLS | Left section: 2 groups of 4 outputs and 4 inputs each Center section: resolver interface and I/O control Right section: 2 groups of 4 outputs and 4 inputs each | Programmable limit switch module | Requires 3 RTBs: 1756-TBNH or 1756-TBSH |

Accessories - I/O Modules

1756 Removable Terminal Blocks



Removable terminal blocks (RTBs) provide a flexible interconnection between your plant wiring and 1756 I/O modules. The RTB plugs into the front of the I/O module. The type of module determines which RTB you need. You can choose screw-clamp or spring-clamp RTBs.

RTBs are not shipped with I/O modules. You must order them separately. The standard housing on the front of the wiring arm is not deep enough for 2.5 mm² (14 AWG) wiring. If you plan to use 2.5 mm² (14 AWG) wiring, also order the extended housing.


| Attribute | 1756-TBNH | 1756-TBSH | 1756-TBCH | 1756-TBS6H | 1756-TBE |
|-------------------|----------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------|
| Description | 20-position NEMA screw-clamp removable block | 20-pin spring-clamp removable terminal block with standard housing | 36-pin cage-clamp removable terminal block with standard housing | 36-pin spring-clamp removable terminal block with standard housing | Extended depth terminal block housing |
| Screw torque | 0.8...1 N•m 7...9 lb•in | | 0.4 N•m 4.4 lb•in | | — |
| Screwdriver width | 8 mm (5/16 in.) max | | | | |

Wiring Systems

As an alternative to buying RTBs and connecting the wires yourself, you can buy a wiring system of:



- interface modules (IFMs) that provide the output terminal blocks for digital I/O modules. Use the pre-wired cables that match the I/O module to the IFM.
- analog interface modules (AIFMs) that provide the output terminal blocks for analog I/O modules. Use the pre-wired cables that match the I/O module to the AIFM.
- I/O module-ready cables. One end of the cable assembly is an RTB that plugs into the front of the I/O module. The other end has individually color-coded conductors that connect to a standard terminal block.

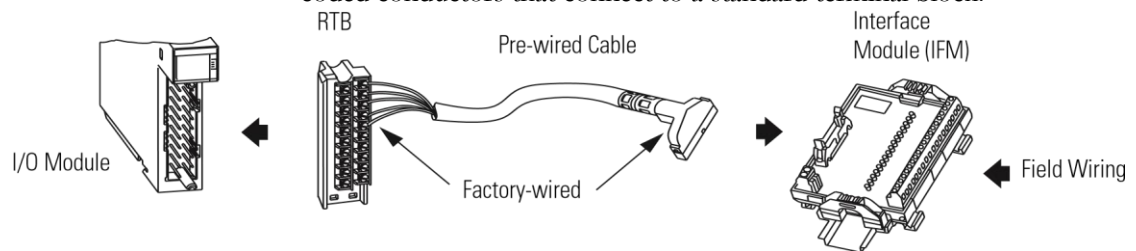

PanelConnect Modules



A PanelConnect module and its sensor connection system connect sensors directly to I/O modules by using convenient pre-built cables and connectors.

The PanelConnect module mounts on the enclosure and creates the correct seal for the entry of the sensor connections. You do not need to seal the opening where the sensor cables enter the enclosure, create custom connectors, or wire to those custom connectors.

ControlLogix Integrated Motion Modules

The Logix architecture supports motion control components that work in a wide variety of machine architectures.

- The Kinetix integrated-motion solution uses a SERCOS interface module to perform complex, multi-axis, synchronized motion. With a Kinetix system, you reap the full benefit of the Integrated Architecture platform because the integration doesn't stop at the controller. This system integrates the drive, the motor, and even the actuator at a lower cost per axis of motion. Use the same RSLogix 5000 programming software to configure, program, and commission your application.
- Logix integrated motion supports the analog family of servo modules for controlling drives/actuators. This solution is separate from the SERCOS interface. The analog family of servo modules provide a ± 10 voltage analog output and can interface with a variety of feedback device types including rotary/linear absolute and incremental.
- Networked motion provides the ability to connect via the DeviceNet network to a single axis drive to perform simple, point-to-point indexing. You need Ultraware software for drive and indexing configuration.

For detailed specifications, see 1756 ControlLogix Integrated Motion Specifications, publication [1756-TD004A-EN-P](#).

For more information, see the:

- Motion Analyzer CD to size your motion application and to make final component selection. Download the software from <http://www.ab.com/motion/software/analyzer.html>
- Kinetix Motion Control Selection Guide, publication [GMC-SG001](#), to verify drive, motor, and accessory specifications.

SERCOS Interface Modules


| Cat. No. | Description | Number of Axis |
|-------------|------------------------------------------------------------------|----------------|
| 1756-M16SE | Rockwell Automation SERCOS interface modules | 16 |
| 1756-M08SE | | 8 |
| 1756-M03SE | | 3 |
| 1756-M08SEG | SERCOS interface drives that are Extended Pack Profile compliant | 8 |

Example Configuration - SERCOS Interface Module

The SERCOS interface modules use a single, digital fiber-optic link, which eliminates as many as 18 digital wires per axis. Detailed drive-status information can be sent from drive to controller and from controller to drive.

The SERCOS interface modules can connect to these servo drives:

- 2093 Kinetix 2000 multi-axis servo drive
- 2094 Kinetix 6000 multi-axis servo drive
- 2099 Kinetix 7000 high-power servo drive
- 2098 Ultra3000 SERCOS servo drive

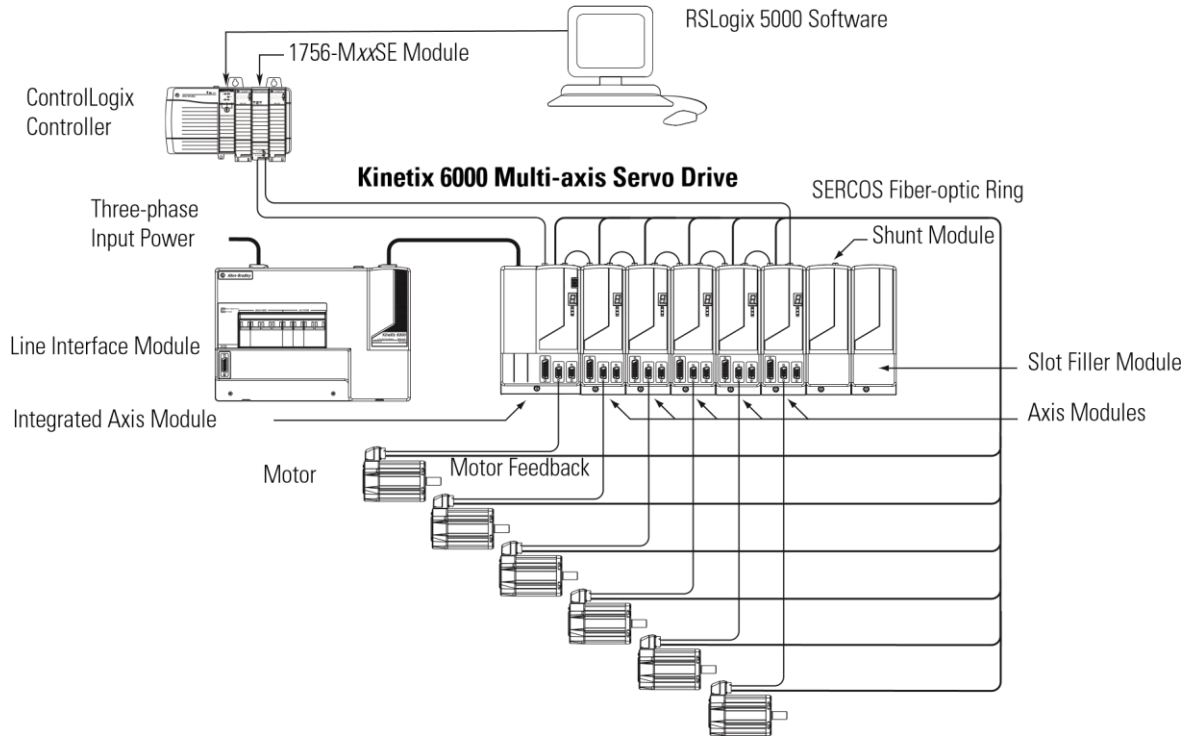


Analog Motion Interface Modules

| Cat. No. | Description | Number of Axis |
|------------|--------------------------------------------------------|----------------|
| 1756-M02AE | Analog servo interface drives with quadrature feedback | 2 |
| 1756-HYD02 | Analog, hydraulic servo interface drives LDT feedback | 2 |
| 1756-M02AS | Analog servo interface drives with SSI feedback | 2 |

Example Configuration - Analog Motion Interface Module

The ControlLogix family of analog servo modules is a cost effective option for closed-loop or open-loop motion control of devices that support an analog interface. The analog servo modules provide a ± 10 volt analog output-command reference and support a variety of position feedback devices. As many as two axes can be controlled per module, and multiple modules can be used to provide as many as 32 axes of control per ControlLogix controller.

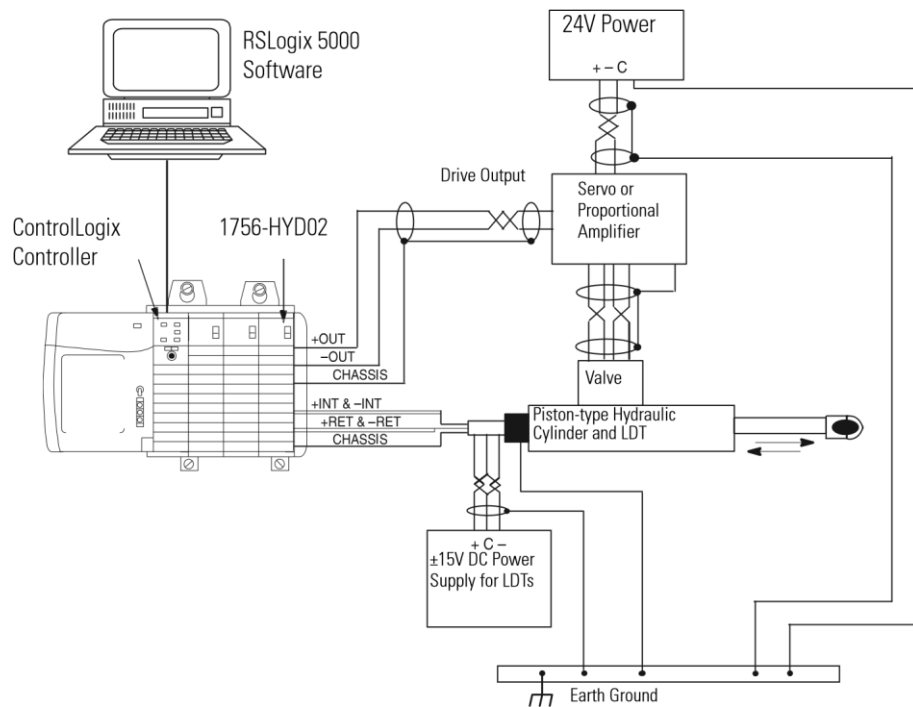

ControlLogix

Separate communication modules are available for different networks. Install

Communication Modules

multiple communication modules into the ControlLogix backplane to bridge or route control and information data between different networks. You can

route a message through a maximum of four chassis (eight communication hops). You do not need a ControlLogix controller in the chassis.

Networks

| Application | Network | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------|
| <ul style="list-style-type: none"> Plant management (material handling) Configuration, data collection, and control on a single, high-speed network Time-critical applications with no established schedule Inclusion of commercial technologies (such as video over IP) Internet/Intranet connection | EtherNet/IP network | page 19 |
| <ul style="list-style-type: none"> High-speed transfer of time-critical data between controllers and I/O devices Deterministic and repeatable data delivery Media redundancy Intrinsic safety Redundant controller systems | ControlNet network | page 21 |

Select a ControlLogix System

| | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|---------|
| <ul style="list-style-type: none"> • Connections of low-level devices directly to plant floor controllers, without interfacing them through I/O modules • Data sent as needed • More diagnostics for improved data collection and fault detection • Less wiring and reduced start-up time than a traditional, hard-wired system | DeviceNet network | page 23 |
| <ul style="list-style-type: none"> • Plant-wide and cell-level data sharing with program maintenance • Data sent regularly • Transfer of information between controllers | Data Highway Plus network | page 25 |
| <ul style="list-style-type: none"> • Connections between controllers and I/O adapters • Data sent regularly • Distributed control so that each controller has its own I/O and communicates with a supervisory controller | Remote I/O network | page 25 |
| <ul style="list-style-type: none"> • Fieldbus transmitters and actuators • Closed-loop control • Process automation | Foundation Fieldbus network | page 27 |
| <ul style="list-style-type: none"> • Modems • Supervisory control and data acquisition (SCADA) | Serial network | page 29 |
| Connections to existing DH-485 networks | DH-485 network | page 30 |
| SynchLink fiber-optic communication to: <ul style="list-style-type: none"> • controllers • power distribution systems • PowerFlex 700S drives | SynchLink network | page 31 |


For detailed specifications, see 1756 ControlLogix Network Specifications, publication [1756-TD003A-EN-P](#).

EtherNet/IP Communication Modules

The Ethernet Industrial (EtherNet/IP) network protocol is an open industrial-networking standard that supports both real-time I/O messaging and message exchange. The EtherNet/IP network uses off-the-shelf Ethernet communication chips and physical media.

| Cat. No. | Description | Communication Rate | TCP/IP Connections | Logix Connections |
|-------------|------------------------------------------------------------------|--------------------|--------------------|-------------------|
| 1756-EN2F | EtherNet/IP communication bridge module, fiber | 100 Mbps | 128 | 256 |
| 1756-EN2T | EtherNet/IP communication bridge module, copper | 10/100 Mbps | 128 | 256 |
| 1756-ENBT | EtherNet/IP communication bridge module, copper | 10/100 Mbps | 64 | 128 |
| 1756-EWEB | Ethernet web server module | 10/100 Mbps | 64 | 128 |
| 1756-EN2TXT | ControlLogix-XT, EtherNet/IP communication bridge module, copper | 10/100 Mbps | 64 | 256 |

Example Configuration - EtherNet/IP Network

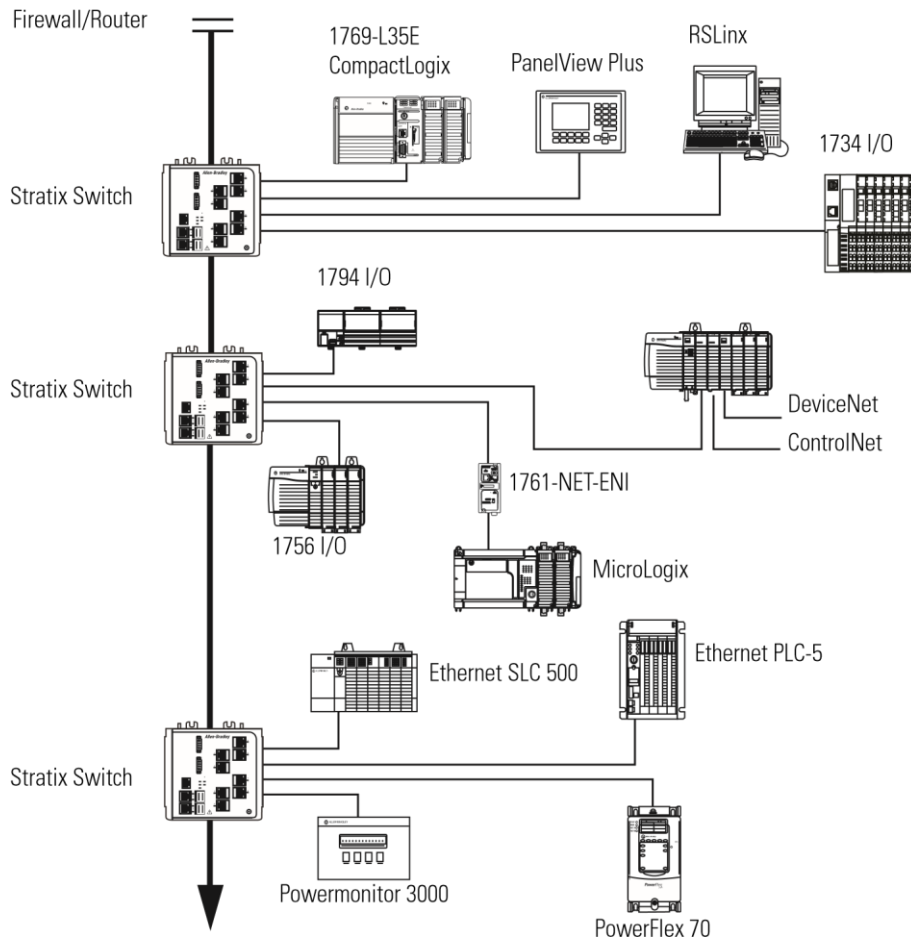

Accessories - EtherNet/IP Network


| Cat. No. | Description | Specifications |
|----------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1585J-M8PBJM-x | Ethernet RJ45 patchcord x = 2 (2 m), 5 (5 m) or 10 (10 m) | 8-conductor, Teal Riser PVC Cable (Flex Rated cable also available) |
| 1585J-M8CC-H | RJ45 insulation displacement connector (IDC) | 0.128...0.325 mm ² (26...22 AWG), Cat. 6, IDC, no tool required |
| 1585J-M8CC-C | RJ45 crimp connector with boot, qty = 50 pieces | 0.128...0.205 mm ² (26...24 AWG, Cat. 5e, requires crimp tool for assembly) |
| 1585A-Jcrimp | Crimp tool | — |
| 9300-RADES | Remote access dial-in kit | 56 Kbps modem connection to devices on an Ethernet network, includes: <ul style="list-style-type: none"> • pre-configured modem • communication module • DIN rail mounting hardware • associated cables |

ControlNet Communication Modules

The ControlNet network is an open, control network for real-time, high-throughput applications. The ControlNet network uses the Common Industrial Protocol (CIP) to combine the functionality of an I/O network and a peer-to-peer network, providing high-speed performance for both functions. The ControlNet network gives you deterministic, repeatable transfers of all mission-critical control data in addition to supporting transfers of non-time-critical data. I/O updates and controller-to-controller interlocking always take precedence over program uploads and downloads and messaging.

| Cat. No. | Description | Communication Rate | Logix Connections | Number of Nodes |
|-------------|--------------------------------------------------------------------------|--------------------|-------------------|-----------------|
| 1756-CN2 | ControlNet communication bridge module, standard media | 5 Mbps | 100 | 99 |
| 1756-CN2R | ControlNet communication bridge module, redundant media | 5 Mbps | 100 | 99 |
| 1756-CNB | ControlNet communication bridge module, standard media | 5 Mbps | 40...48 | 99 |
| 1756-CNBR | ControlNet communication bridge module, redundant media | 5 Mbps | 40...48 | 99 |
| 1756-CN2RXT | ControlLogix-XT, ControlNet communication bridge module, redundant media | 5 Mbps | 100 | 99 |


Example Configuration - ControlNet Network

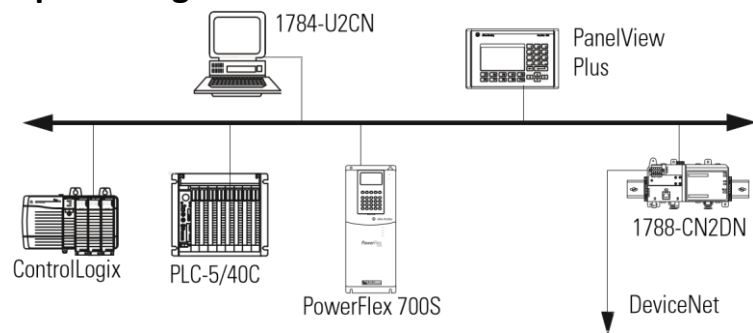

Example Configuration - Redundant ControlNet Media

Redundant ControlNet media requires these components:

- 1756-CN2R or 1756-CNBR ControlNet module
- Two identical ControlNet links

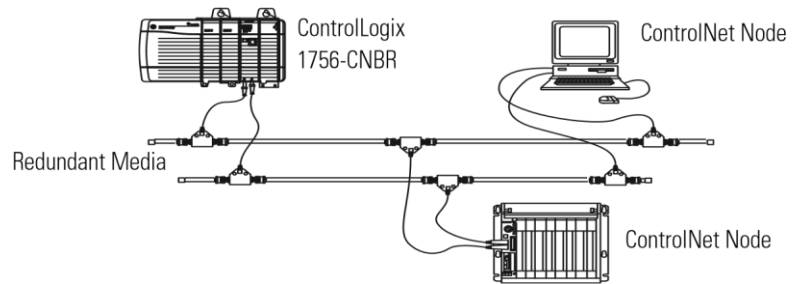

Accessories - ControlNet Network


| Cat. No. | Description |
|------------------|------------------------------------------------------|
| Taps | |
| 1786-TPR | T-tap right angle |
| 1786-TPS | T-tap straight |
| 1786-TPYR | Y-tap right angle |
| 1786-TPYS | Y-tap straight |
| Cables | |
| 1786-CP | Programming cable to ControlNet RJ45 port |
| 1786-RG6 | ControlNet network, shield high-flex cable |
| 1756-RG6F | ControlNet network, quad-shield high-flex coax cable |
| Other | |
| | ControlNet termination resistor |
| 1786-XT | |
| Repeaters | |
| 1786-RPA | ControlNet modular repeater adapter |
| 1786-RPCD | ControlNet coaxial hub repeater |
| 1786-RPFRL | ControlNet fiber ring repeater, long |
| 1786-RPFRXL | ControlNet fiber ring repeater, extra long |
| 1786-RPFS | ControlNet fiber ring repeater, short |
| 1786-RPFM | ControlNet fiber ring repeater, medium |

DeviceNet Communication Module

The DeviceNet network is an open, low-level network that provides connections between simple industrial devices (such as sensors and actuators) and higher-level devices (such as controllers and computers). The DeviceNet network uses the proven Common Industrial Protocol (CIP) to provide the control, configure, and data collection capabilities for industrial devices.

| Cat. No. | Description | Communication Rate | Number of Nodes |
|----------|---------------------------------------|----------------------------------------------------------------------|-----------------|
| 1756-DNB | DeviceNet communication bridge module | 125 Kbps (500 m max) 250 Kbps (250 m max) 500 Kbps (100 m max) | 64 |

Example Configuration - DeviceNet Network

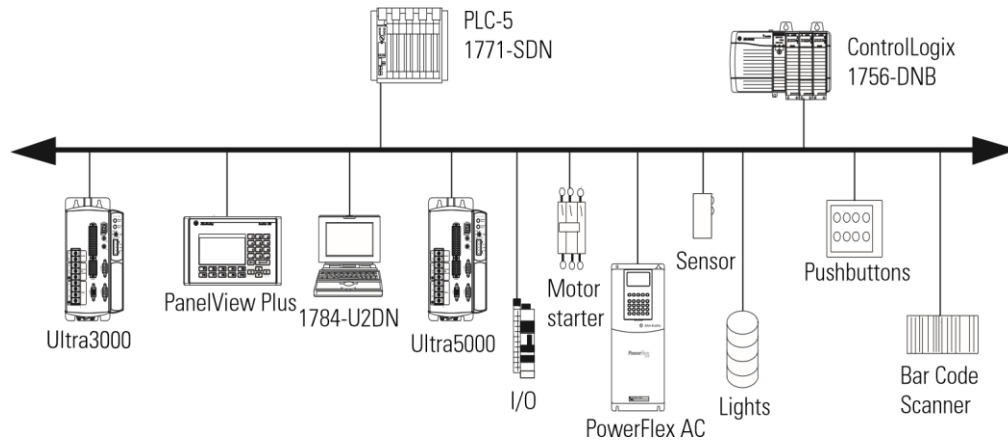

Accessories - DeviceNet Network

| Cat. No. | Description |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KwikLink Lite flat media | KwikLink Lite flat media is a newer, ODVA-approved solution for wiring DeviceNet networks. Drop-lines for connecting nodes are added by using the KwikLink Lite two-piece connectors. This cable system supports the intermixing of DeviceNet cable types (thin-round with flat). All of the KwikLink Lite connectors provide insulation displacement technology with reduced assembly time. |
| KwikLink flat media | The KwikLink flat media system provides a modular cabling method with its flat 4-wire cable and insulation displacement connectors (IDCs). The KwikLink system allows nodes to be added to the network without severing the trunkline. Cutting or stripping of the trunkline is eliminated, as is the need for predetermined cable lengths. |
| Round media | Round trunk cable is available in bulk spools or as pre-molded cordsets or patchcords in varying lengths. A wide variety of rugged, durable DeviceNet components is available for use in round trunk systems. Stainless steel versions of round cable system components are also available. <ul style="list-style-type: none"> • Thick-trunk round media systems use thick cable for maximum DeviceNet trunk line length. • Round media thin-trunk systems use thin cable to reduce maximum trunk line distances with a more compact and cost-effective installation for some applications. Thin-cable outer jacket material is TPE for additional chemical resistance. |

Data Highway Plus and Remote I/O Communication Modules


The Data Highway Plus network supports messaging between devices. The remote I/O link connects to remote I/O chassis and other intelligent devices.

The 1756-DHRIO module supports messaging between devices on DH+ networks. The remote I/O functionality enables the module to act as a scanner for transferring digital and block-transfer data to and from remote I/O devices.


The 1756-RIO module can act as a scanner or adapter on a remote I/O network. In addition to digital and block-transfer data, the 1756-RIO module transfers analog and specialty data without message instructions.

| Cat. No. | Description | Communication Rate | DH+ Connections | RIO Connections | Logix Connections |
|--------------|--------------------------------------------------------------------|----------------------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------|-------------------|
| 1756-DHRIO | Data Highway Plus/Remote I/O communication module | DH+: 57.6 Kbps RIO: 57.6 Kbps, 115.2 Kbps, 230.4 Kbps | 32 DH+ messages per DH+ channel | 32 logical rack connections per remote I/O channel 16 block-transfer connections per remote I/O channel | 32 |
| 1756-RIO | Remote I/O communication module | RIO: 57.6 Kbps, 115.2 Kbps, 230.4 Kbps | na | 32 physical racks (0...76), any combination of rack size and block transfers | 10 scheduled I/O |
| 1756-DHRIOXT | ControlLogix-XT, Data Highway Plus/Remote I/O communication module | DH+: 57.6 Kbps RIO: 57.6 Kbps, 115.2 Kbps, 230.4 Kbps | 32 DH+ messages per DH+ channel | 32 logical rack connections per remote I/O channel 16 block-transfer connections per remote I/O channel | 32 |

Example Configuration - DH+ Network

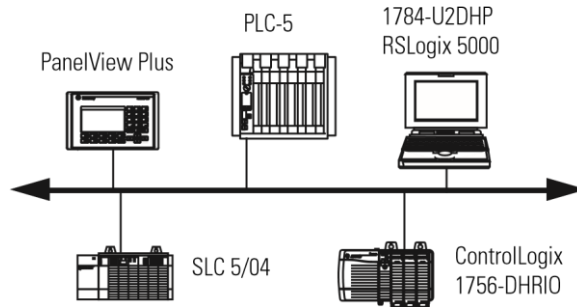

Example Configuration - Remote I/O Network

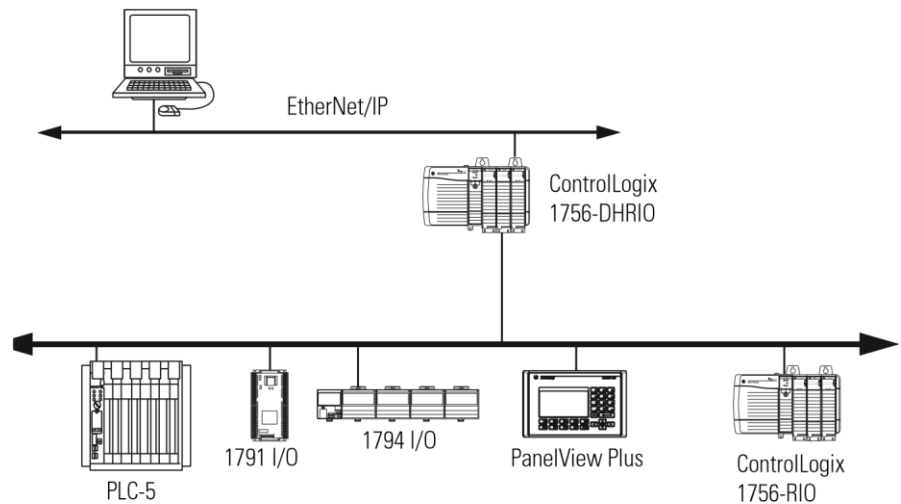

Accessories - DH+ and Remote I/O Networks

| Cat. No. | Description | Specifications |
|-------------|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1770-CD | Cable to connect communication module to DH+ network | Belden 9463 twinaxial |
| 9300-RADKIT | Remote access dial-in kit | 56 Kbps modem connection to devices on a DH+ network, includes: <ul style="list-style-type: none"> • pre-configured modem • communication module • DIN rail mounting hardware • associated cables |


Foundation Fieldbus Linking Devices

Foundation Fieldbus is a communication network created by the Fieldbus Foundation. It is a protocol designed for robust, distributed control of process


control applications. Devices connected by a Foundation Fieldbus network can be used for sophisticated, highly-distributed process control.

| Cat. No. | Description | Communication Rate | Number of H1 ports | Number of Devices per H1 Link | Number of Devices per Linking Device |
|-------------|----------------------------------------------------------------------|-----------------------------------------------------------------------|--------------------|-------------------------------|--------------------------------------|
| 1757FFLD2 | Foundation Fieldbus linking device bridges from an Ethernet network | Foundation Fieldbus: 31.25 Kbps EtherNet/IP: 10/100 Mbps | 2 | 16 (8...10 recommended) | 32 |
| 1757-FFLD4 | | | 4 | | 64 |
| 1757-FFLDC2 | Foundation Fieldbus linking device bridges from a ControlNet network | Foundation Fieldbus: 31.25 Kbps ControlNet: 5 Mbps | 2 | 16 (8...10 recommended) | 32 |
| 1757-FFLDC4 | | | 4 | | 64 |

Example Configuration - EtherNet/IP Network to Foundation Fieldbus Network

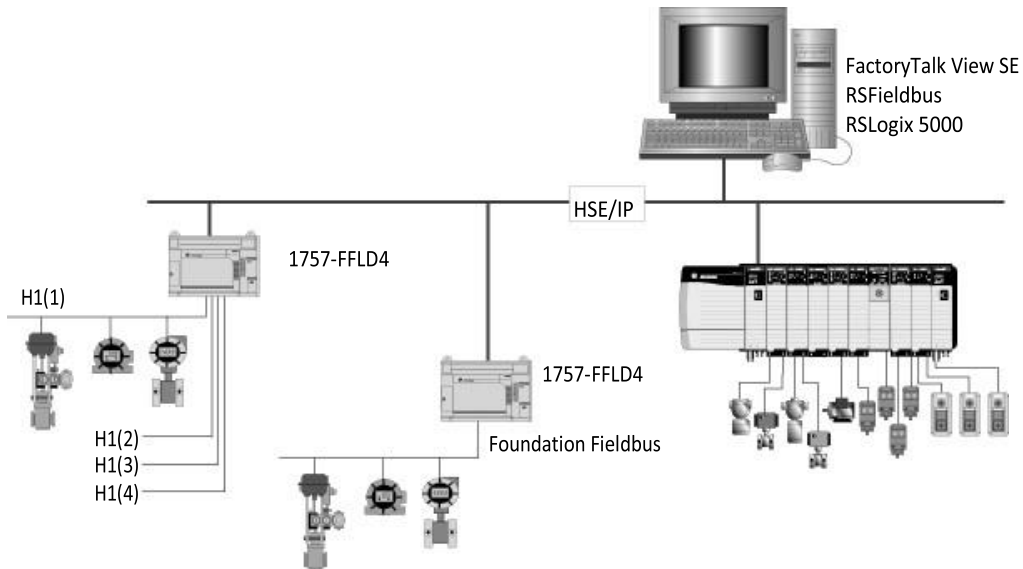

Example Configuration - ControlNet Network to Foundation Fieldbus Network

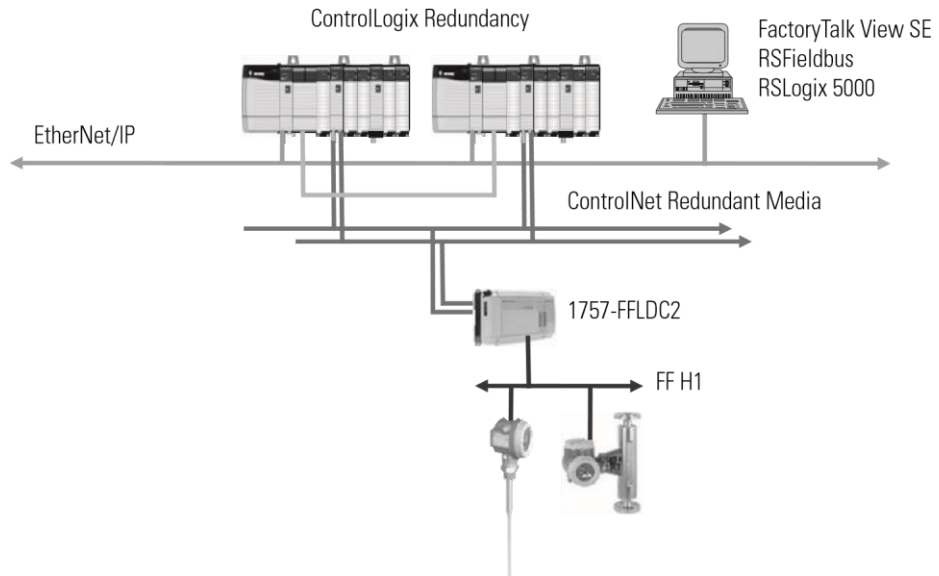


Accessories - Foundation Fieldbus Network

| Cat. No. | Description |
|----------|------------------------------------------------------------------------|
| DIN rail | 35 x 7.5 or 35 x 15 DIN (EN 50 022), zinc-plated yellow chromate steel |

Serial Communication

The controller serial port is compatible with RS-232 serial communication. The serial port supports the DF1 protocol to communicate with other devices on the serial link.

Example Configuration - Serial Communication

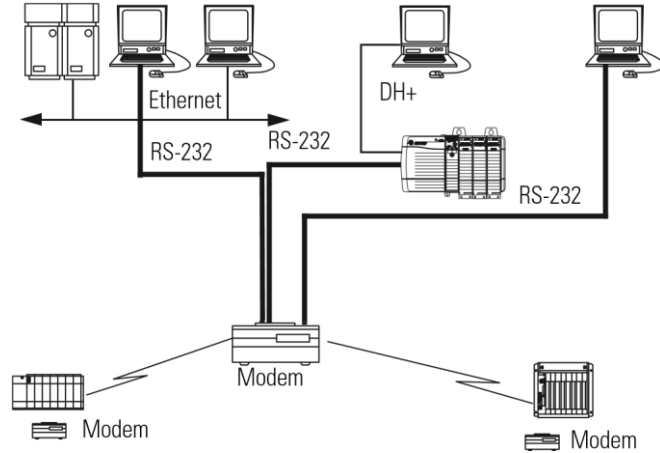

Modbus Support


To use Logix5000 controllers on Modbus, you connect through the serial port and execute a specific ladder logic routine. The controller project is available with RSLogix 5000 Enterprise programming software. For more information, see Using Logix5000 Controllers as Masters or Slaves on Modbus Application Solution, publication [CIG-AP129](#).

DH-485 Communication Module

The controller serial port is compatible with DH-485 communication. The DH-485 connection does support remote programming and monitoring via RSLogix 5000 software.

| Cat. No. | Description | Communication Rate |
|------------|------------------------------------|------------------------|
| 1756-DH485 | DH-485 communication bridge module | 19.2 Kbps 9600 Kbps |

Example Configuration - DH-485 Network

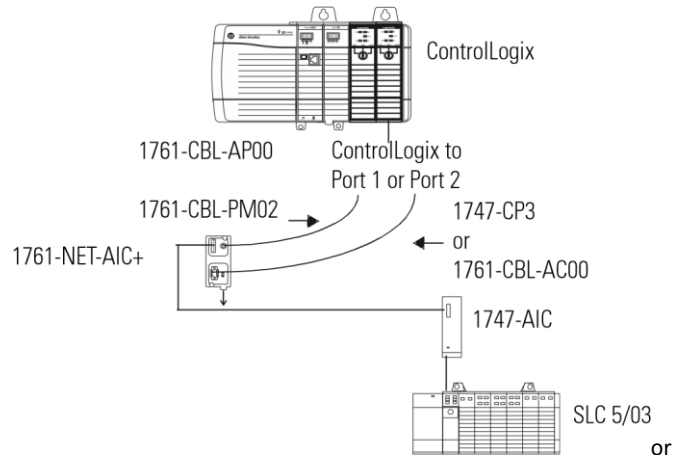

Accessories - DH-485 Network

| Cat. No. | Description | Specifications |
|---------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1747-CP3 | 9-pin D-shell, straight; 9-pin D-shell, right angle | 3 m (9.8 ft) |
| 1761-CBL-AC00 | 9-pin D-shell, right angle; 9-pin D-shell, right angle | 45 cm (17.7 in.) |
| 1761-CBL-AP00 | 9-pin D-shell, right angle; 8-pin mini-DIN | 45 cm (17.7 in.) |
| 1761-CBL-PM02 | 9-pin D-shell, straight; 8-pin mini-DIN | 2 m (6.5 ft) |
| 1761-NET-AIC | Advanced Interface Converter (AIC+) connects each channel on the 1756-DH485 module to the DH-485 network | <ul style="list-style-type: none"> • 20.4...28.8V DC power source required • Typical 120 mA 24V DC current draw |
| 9300-RADKIT | Remote access dial-in kit | 56 Kbps modem connection to devices on a DH+ network, includes: <ul style="list-style-type: none"> • Pre-configured modem • Communication module • DIN rail mounting hardware • Associated cables |

SynchLink Communication Module

The SynchLink module provides time synchronization and data broadcasting capabilities for distributed motion and coordinated drive control. The 1756-SYNCH SynchLink module connects a ControlLogix chassis to a SynchLink fiber-optic communication link. The module:


- coordinates Coordinated System Time across multiple ControlLogix chassis.
- moves a limited amount of data from one chassis to another at a high speed.
- lets one controller consume motion axes data from a controller in another chassis.

| Cat. No. | Description | Communication Rate |
|------------|---------------------------------------|--------------------|
| 1756-SYNCH | SynchLink communication bridge module | 5 Mbps |

Example Configuration - 1756-SYNCH Star Topology

Requires:

- 1751-SLBA base block
- 1751-SL4SP four-port splitter block Supports:
 - 2 layers of hubs
 - 16 end nodes per hub
 - 257 nodes (including master node) per star network

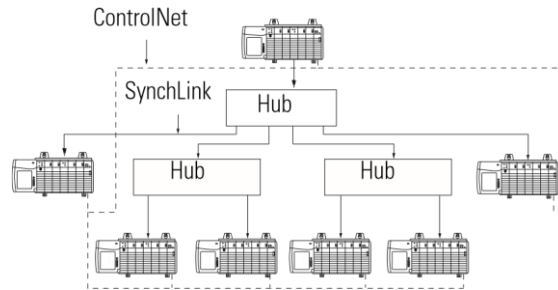


Example Configuration - 1756-SYNCH Daisy-chain Topology

Optional:

- 1751-SLBP bypass switch block

Supports:

- 10 nodes (including master and end nodes) per daisy-chain network

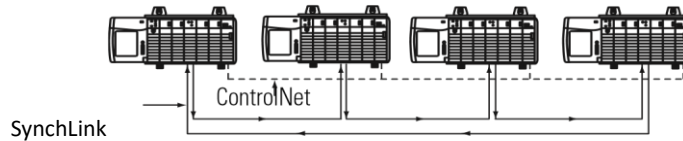


Example Configuration - 1756-SYNCH Ring Topology

Optional:

- 1751-SLBP bypass switch block

Supports:

- 10 nodes (including master and end nodes) per ring network

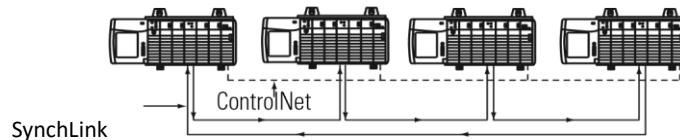

Accessories - SynchLink Network

| Cat. No. | Description |
|------------------|--------------------------------------------------|
| 1403-CFxxx | Fiber-optic cable assembly (Rockwell Automation) |
| HCP-M0200T V01RK | Lucent Technologies 200 μm simplex cable |

ControlLogix Controllers

The ControlLogix controller provides a scalable controller solution that is capable of addressing a large amount of I/O points.

The controller can be placed into any slot of a ControlLogix chassis and multiple controllers can be installed in the same chassis. Multiple controllers in the same chassis communicate with each other over the backplane (just as controllers can communicate over networks) but operate independently.

ControlLogix controllers can monitor and control I/O across the ControlLogix backplane, as well as over I/O links. ControlLogix controllers can communicate over EtherNet/IP, ControlNet, DeviceNet, DH+, Remote I/O, and RS-232-C (DF1/DH-485 protocol) networks and many third party process and device networks. To provide communication for a ControlLogix controller, install the appropriate communication interface module into the chassis.

| Cat. No. | Description | User Memory |
|------------|----------------------------------------------------------------------------|-------------|
| 1756-L61 | ControlLogix, standard controller | 2 MB |
| 1756-L62 | | 4 MB |
| 1756-L63 | | 8 MB |
| 1756-L64 | | 16 MB |
| 1756-L65 | | 32 MB |
| 1756-L61S | GuardLogix, safety controller | 2 MB |
| 1756-L62S | | 4 MB |
| 1756-L63S | | 8 MB |
| 1756-LSP | GuardLogix safety partner (one is required for each GuardLogix controller) | na |
| 1756-L63XT | ControlLogix-XT controller | 8 MB |

For detailed specifications, see 1756 ControlLogix Controllers Specifications, publication [1756-TD001A-EN-P](#).

Standard ControlLogix Controllers

The ControlLogix controller is part of the Logix5000 family of controllers. A ControlLogix system includes:

- the ControlLogix controller, available in different combinations of user memory.
- RSLogix 5000 programming software.
- 1756 ControlLogix I/O modules that reside in a 1756 chassis.
- separate communication modules for network communications
- a built-in serial port on every ControlLogix controller.



Features - Standard ControlLogix Controllers

| Feature | 1756-L61, 1756-L62, 1756-L63, 1756-L64, 1756-L65 | |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Controller tasks | <ul style="list-style-type: none"> • 32 tasks • 100 programs/task • Event tasks: all event triggers | |
| Built-in communication ports | 1 port RS-232 serial | |
| Communication options | <ul style="list-style-type: none"> • EtherNet/IP • ControlNet • DeviceNet | <ul style="list-style-type: none"> • Data Highway Plus • Remote I/O • SynchLink • Third party process and device networks |
| Serial port communication | <ul style="list-style-type: none"> • ASCII • DF1 full/half-duplex • DF1 radio modem | <ul style="list-style-type: none"> • DH-485 • Modbus via logic |
| Controller connections supported, max | 250 | |
| Network connections, per network module | <ul style="list-style-type: none"> • 100 ControlNet (1756-CN2/A) • 40 ControlNet (1756-CNB) | <ul style="list-style-type: none"> • 256 EtherNet/IP; 128 TCP (1756-EN2x) • 128 EtherNet/IP; 64 TCP (1756-ENBT) |
| Controller redundancy | Full support | |
| Integrated motion | SERCOS interface | Analog options: <ul style="list-style-type: none"> • Encoder input • LDT input • SSI input |
| Programming languages | <ul style="list-style-type: none"> • Relay ladder • Structured text | <ul style="list-style-type: none"> • Function block • SFC |



GuardLogix Controllers

A GuardLogix controller is a ControlLogix controller that also provides safety control. The GuardLogix system is a dual controller solution — you must use a 1756-L6xS primary controller and a 1756-LSP safety partner to achieve SIL 3/CAT. 4. A major benefit of this system is that it's still a single project, safety and standard together. The safety partner controller is a part of the system, is automatically configured, and requires no user setup.

During development, safety and standard have the same rules, multiple programmers, online editing, and forcing are all allowed. Once the project is tested and ready for final validation, you set the Safety Task to a SIL 3 integrity level, which is then enforced by the GuardLogix controller. When safety memory is locked and protected, the safety logic can't be modified and all safety functions operate with SIL 3 integrity. On the standard side of the

GuardLogix controller, all functions operate like a regular Logix controller. Thus online editing, forcing, and other activities are all allowed.

With this level of integration, safety memory can be read by standard logic and external devices, like HMIs or other controllers, eliminating the need to condition safety memory for use elsewhere. The result is easy system-wide integration and the ability to display safety status on displays or marquees. Use Guard I/O modules for field device connectivity on Ethernet or DeviceNet networks, and for safety interlocking between GuardLogix controllers use Ethernet or ControlNet networks. Multiple GuardLogix controllers can share safety data for zone to zone interlocking, or a single GuardLogix controller can use remote distributed safety I/O between different cells/areas.

Features - GuardLogix Controllers

In addition to the standard features of a ControlLogix controller, the GuardLogix controller has these safety-related features.

| Feature | 1756-L61S, 1756-L62S, 1756-L63S, 1756-LSP | |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Safety communication options | Standard and safety networks <ul style="list-style-type: none"> • EtherNet/IP • ControlNet • DeviceNet | |
| Network connections, per network module | <ul style="list-style-type: none"> • 100 ControlNet (1756-CN2/A) • 40 ControlNet (1756-CNB) | <ul style="list-style-type: none"> • 256 EtherNet/IP; 128 TCP (1756-EN2x) • 128 EtherNet/IP; 64 TCP (1756-ENBT) |
| Controller redundancy | Not supported | |
| Programming languages | Relay ladder | |

ControlLogix-XT Controllers

The ControlLogix-XT controllers function in the same way as the traditional ControlLogix controllers. The ControlLogix-XT products include control and communication system components that, when used with FLEX I/O-XT products, provide a complete control system solution that can be used in environments where temperatures range from -20...70 °C (-4...158 °F).

When used independently, the ControlLogix-XT system can withstand environments where the temperature ranges from -25...70 °C (-13...158 °F).

Redundant ControlLogix Controllers

The ControlLogix controller supports controller redundancy. In a redundant controller system, you need these components:

- Two 1756 chassis each with the same:
 - number of slots.
 - modules in the same slots.
 - redundancy firmware revisions in each module.
 - Two additional ControlNet nodes outside the redundant chassis pair.

You need **one** of the following redundancy modules:

- One 1756-RM module per chassis, which supports:
 - two 1756-L61, 1756-L62, 1761-L63 controllers or one 1756-L64 controller.
 - maximum of seven communication modules, which can be 1756-CN2 series B, 1756-CN2R series B, and 1756-EN2T modules.
 - one 1756-RMC_x cable.
- One 1757-SRM module per chassis, which supports:
 - one 1756-L61, 1756-L62, 1756-L63, 1756-L64 controller.
 - maximum of seven communication modules, which can be 1756-CNB series D or E, 1756-CNBR series D or E, 1756-ENBT, and 1756-EWEB modules.
 - one 1757-SRC_x cable.

Accessories - Controllers

1784 Industrial CompactFlash Cards

CompactFlash cards offer nonvolatile memory (flash) to permanently store a user program and tag data on a ControlLogix controller. You install the 1784 CompactFlash card in a socket on the controller. You can manually trigger the controller to save to or load from nonvolatile memory or configure the controller to load from nonvolatile memory on powerup.

The GuardLogix controller does not support user program storage or retrieval by using a CompactFlash card.

| Attribute | 1784-CF64 | 1784-CF128 |
|-----------------|-----------------|------------|
| Memory | 64 MB | 128 MB |
| Weight, approx. | 14.2 g (0.5 oz) | |


1756 ControlLogix Batteries

Each ControlLogix controller ships with a battery. The 1756-L6x controllers have nonvolatile memory if you install a 1784-CF64 or 1784-CF128 industrial CompactFlash card. With nonvolatile memory, the controller can be used without a battery. If you do not use a battery, current tag data will be at the state it was when the nonvolatile memory was saved.

| Attribute | 1756-BA1 | 1756-BA2 | 1756-BATM ⁽¹⁾ | 1756-BATA |
|-----------------------------|----------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Description | Lithium battery (0.59 g) | Lithium battery (0.59 g) | Externally mounted battery assembly | Replacement lithium battery for 1756-BATM (5 g max lithium per each D cell; contains 2 D cells) |
| ControlLogix controllers | 1756-L61, 1756-L62, 1756-L63 controllers, series A | 1756-L61, 1756-L62, 1756-L63 controllers, series B 1756-L64, 1756-L65 controllers | 1756-L61, 1756-L62, 1756-L63 controllers, series A | 1756-BATM battery module |
| GuardLogix controllers | — | 1756-L61S, 1756-L62S, 1756-L63S | — | — |
| ControlLogix-XT controllers | — | 1756-L63XT controllers | — | — |

⁽¹⁾ The 1756-BATM externally mounted battery assembly is highly recommended for use with all series A 1756-L6x controllers and provides longer battery life than the 1756-BA1 battery. The 1756-BATM includes one 1756-BATA lithium battery assembly and a 1 m (3.28 ft) cable to connect housing to controller.

ControlLogix Chassis



The ControlLogix system is a modular system that requires a 1756 I/O chassis. Place any module into any slot. The backplane provides a high-speed communication path between modules.

All of the chassis are designed for horizontal-only, back-panel mounting. The chassis are available in these configurations:

- standard chassis.
- ControlLogix-XT chassis.

For detailed specifications, see 1756 ControlLogix Chassis Specifications Specifications, publication [1756-TD006A-EN-P](#).

Features - Chassis

- Slot guides and snap-in retention for easy and secure module fit for any type of 1756 module.
- Direct mounting accommodates any 1756 power supply.

Standard Chassis

The chassis backplane provides a high-speed communication path between modules and distributes power to each of the modules within the chassis.

| Cat. No. | Description | Slots |
|----------|--------------------------------|-------|
| 1756-A4 | ControlLogix, standard chassis | 4 |
| 1756-A7 | | 7 |
| 1756-A10 | | 10 |
| 1756-A13 | | 13 |
| 1756-A17 | | 17 |

ControlLogix-XT Chassis

The ControlLogix-XT products include control and communication system components that, when used with FLEX I/O-XT products, provide a complete control system solution that can be used in environments where temperatures range from -20...70 °C (-4...158 °F).

When used independently, the ControlLogix-XT system can withstand environments where the temperature ranges from -25...70 °C (-13...158 °F).

| Cat. No. | Description | Slots |
|------------|-------------------------|-------|
| 1756-A5XT | ControlLogix-XT chassis | 5 |
| 1756-A7LXT | | 7 |

Accessories - Chassis

Use a slot filler module to fill empty slots.

| Cat. No. | Description |
|-----------|---------------------------------------------------------------------|
| 1756-N2 | Slot filler module for empty slots in standard ControlLogix chassis |
| 1756-N2XT | Slot filler module for empty slots in ControlLogix-XT chassis |

ControlLogix Power

ControlLogix power supplies are used with the 1756 chassis to provide 1.2V,

Supplies

3.3these configurations:V, 5V, and 24V DC power directly to the chassis backplane. Select from



- standard power.
- redundant power.
- ControlLogix-XT power.

For detailed specifications, see 1756 ControlLogix Power Supplies Specifications, publication [1756-TD005A-EN-P](#).

Standard Power Supplies

You mount a standard power supply directly on the left end of the chassis, where it plugs directly into the backplane.

| Cat. No. | Description | Voltage Category | Operating Voltage Range | Chassis |
|-----------|------------------------|------------------|-------------------------|---------------------------------|
| 1756-PA72 | ControlLogix, standard | 120V/220V AC | 85...265V AC | Standard, series A and series B |
| 1756-PB72 | | 24V DC | 18...32V DC | Standard, series A and series B |
| 1756-PA75 | | 120V/220V AC | 85...265V AC | Standard series B |
| 1756-PB75 | | 24V DC | 18...32V DC | Standard series B |
| 1756-PC75 | | 48V DC | 30...60V DC | Standard series B |
| 1756-PH75 | | 125V DC | 90...143V DC | Standard series B |

Redundant Power Supplies

To build a redundant power supply system, you need:

- two redundant power supplies (both 1756-PA75R or 1756-PB75R).
- one 1756-PSCA2 chassis adapter module.
- two 1756-CPR2 cables to connect the power supplies to the 1756-PSCA2 chassis adapter module (0.91 m (3 ft) length).
- user-supplied annunciator wiring to connect the power supplies to the input modules, as needed.

The 1756-PSCA2 chassis adapter module is a passive device that funnels power from the redundant power supplies to the single power connector on the ControlLogix series B chassis backplane.

| Cat. No. | Description | Voltage Category | Operating Voltage Range | Chassis |
|----------|-------------|------------------|-------------------------|---------|
|----------|-------------|------------------|-------------------------|---------|

| | | | | |
|------------|-------------------------|--------------|---------------|-------------------|
| 1756-PA75R | ControlLogix, redundant | 120V/220V AC | 85...265V AC | Standard series B |
| 1756-PB75R | | 24V DC | 19.2...32V DC | Standard series B |

Accessories - Redundant Power Supplies

| Cat. No. | Description | Specifications |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| 1756-PSCA2 | Chassis adapter module. Funnel power from the redundant power supplies to the single power connector on the ControlLogix series B chassis backplane. | Mounts directly to left side of 1756 chassis |
| 1756-CPR2 | Chassis adapter cable. Connects redundant power supply to 1756-PCSA2 chassis adapter. | Length: 0.91 m (3 ft) |

ControlLogix-XT Power Supplies

The ControlLogix-XT products include control and communication system components that, when used with FLEX I/O-XT products, provide a complete control system solution that can be used in environments where temperatures range from -20...70 °C (-4...158 °F).

When used independently, the ControlLogix-XT system can withstand environments where the temperature ranges from -25...70 °C (-13...158 °F).

| Cat. No. | Description | Voltage Category | Operating Voltage Range | Chassis |
|-----------|-----------------|------------------|-------------------------|---------|
| 1756-PBXT | ControlLogix-XT | 24V DC | 18...32V DC | XT |

Visualization Products

Visualization products, together with Logix for control and NetLinx architecture for communication, make up the Rockwell Automation Integrated Architecture strategy. The visualization strategy combines Rockwell Automation expertise in Allen-Bradley electronic operator interface and industrialized personal computer hardware with Rockwell Software supervisory control software. Current visualization products include:

- FactoryTalk View software.
- PanelView Plus operator interface.
- PanelView Plus CE operator interface.
- Industrial computers and monitors.

For more information, see the Operator Interface catalog pages at <http://www.ab.com/en/epub/catalogs/12762/2181376/1239781/>

Programming Software

Your selection of modules and network configuration determines what software packages you need to configure and program your system.

1756 System Software

| If you have | You need | Order |
|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| 1756 ControlLogix controller | RSLogix 5000 Enterprise Series software | 9324 series |
| 1756 SERCOS or analog motion module | | |
| 1756-CN2, 1756-CN2R 1756-CN2RXT 1756-CNB, 1756-CNBR ControlNet communication module | RSNetWorx for ControlNet software (comes with the Standard/NetWorx and Professional Editions of RSLogix 5000 Enterprise Series software) | 9324-RLD300NXENE (RSNetWorx option) or 9324-RLD700NXENE (RSLogix 5000 Professional software) or 9357-CNETL3 (RSNetWorx for ControlNet) |
| 1756-DNB DeviceNet communication module | RSNetWorx for DeviceNet software (comes with the Standard/NetWorx and Professional Editions of RSLogix 5000 Enterprise Series software) | 9324-RLD300NXENE (RSNetWorx option) or 9324-RLD700NXENE (RSLogix 5000 Professional software) or 9357-DNETL3 (RSNetWorx for DeviceNet) |
| 1756-EN2F, 1756-EN2T 1756-EN2TX 1756-ENBT, 1756-EWEB EtherNet/IP communication module (set the IP address) | RSLink software or BOOTP/DHCP server utility to set IP addresses (RSLink Lite and BOOTP server come with RSLogix 5000 Enterprise Series software) Optional RSNetWorx for EtherNet/IP software (comes with the Standard/RSNetWorx and Professional Editions of RSLogix 5000 Enterprise Series software) | 9324 series Optional 9357-ENETL3 (RSNetWorx for EtherNet/IP) |
| 1756-DHRIO, 1756-DHRIOXT communication module 1756-DH485 communication module | RSLink software | 9324 series |
| 1757-FFLD2, 1757-FFLD4 1757-FFLDC2, 1757-FFLDC4 Foundation Fieldbus linking device | RSFieldbus configuration software | 9308 series |
| Communication card in a workstation | RSLink software (RSLink Lite comes with RSLogix 5000 Enterprise Series software) | 9324 series |

RSLogix 5000 Programming Software

RSLogix 5000 Enterprise Series software is designed to work with Logix5000 controller platforms. RSLogix 5000 Enterprise Series software is an IEC 61131-3 compliant software package that offers relay ladder, structured text, function block diagram, and sequential function chart editors for you to develop application programs. Create your own instructions by encapsulating a section of logic in any programming language into an Add-On Instruction.

RSLogix 5000 Enterprise Series Software Requirements

| Description | Value |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Personal computer | Pentium II 450 MHz min Pentium III 733 MHz (or better) recommended |
| Software requirements | <p>Supported operating systems:</p> <p>RSLogix 5000 software, version 17 has been tested on the following operating systems:</p> <ul style="list-style-type: none"> • Microsoft Windows XP Professional with Service Pack 2 • Microsoft Windows Server 2003 R2 Standard Edition with Service Pack 1 and User Account Control (UAC) turned off • Microsoft Windows 2000 Professional with Service Pack 4 • Microsoft Windows Vista Home Basic with SPI • Microsoft Windows Vista Business with SPI <p>RSLogix 5000 software is expected to operate correctly on the following operating systems, but has not been tested:</p> <ul style="list-style-type: none"> • Microsoft • Microsoft Windows XP Home • Microsoft Windows Server 2003 Standard Edition with Service Pack 1 • Microsoft Windows 2000 Professional with Service Pack 1, 2, or 3 • Microsoft Windows Vista Ultimate • Microsoft Windows Vista Home Premium <p>The Chinese, Japanese, and Korean editions of RSLogix 5000 software are supported only on Microsoft Windows XP, Microsoft Windows Vista, and Microsoft Windows Server 2003. RSLogix 5000 software is supported for 32-bit architectures (x86) and has not been tested with 64-bit architectures (x64).</p> |
| RAM | 128 MB min 256 MB recommended |
| Hard disk space | 3 GB of free hard disk space (or more based on application requirements) |
| Optical drives | DVD |
| Video requirements | 256-color VGA graphics adapter 800 x 600 min resolution (True Color 1024 x 768 recommended) |

RSLogix 5000 Enterprise Series Software Packages

- Replace xx in the catalog number with the appropriate language designation: ZH=Chinese, EN=English, FR=French, DE=German, IT=Italian, JP=Japanese, KO=Korean, PT=Portuguese, and ES=Spanish.
- For upgrades from one package to another, see the StepForward program.

| Available Features | Service Edition 9324-RLD000xxE | Mini Edition 9324-RLD200xxE | Lite Edition 9324-RLD250xxE | Standard Edition: Node Locked 9324-RLD300xxE Concurrent License ⁽¹⁾ 9324-RLD300xxF | Standard/ NetWorx Edition 9324- RLD300NxxE | Full Edition: Node Locked 9324-RLD600xxE Concurrent License ⁽¹⁾ 9324-RLD600xxF | Professional Edition: Node Locked: 9324- RLD700NxxE Concurrent License ⁽¹⁾ 9324- RLD700NxxF |
|-------------------------------------------------------------------------------------------|-----------------------------------|--------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Logix5000 controllers supported | All ⁽²⁾ | CompactLogix FlexLogix | CompactLogix FlexLogix | All | All | All ⁽³⁾ | All |
| Relay ladder diagram editor ⁽⁴⁾ | Upload/download and view | Full support | Full support | Full support | Full support | Full support | Full support |
| Function block diagram 9324-RLDFBDENE ⁽⁴⁾ | Upload/download and view | Upload/download Available separately | Full support | Upload/download Available separately | Upload/download Available separately | Full support | Full support |
| Sequential function chart editor 9324-RLDSFCE ⁽⁴⁾⁽⁵⁾ | Upload/download and view | Upload/download Available separately | Full support | Upload/download Available separately | Upload/download Available separately | Full support | Full support |
| Structured text 9324-RLDSTXE ⁽⁴⁾ | Upload/download and view | Upload/download Available separately | Full support | Upload/download Available separately | Upload/download Available separately | Full support | Full support |
| PhaseManager 9324-RLDPME | Upload/download | Upload/download Available separately | Upload/download Available separately | Upload/download Available separately | Upload/download Available separately | Full support | Full support |
| GuardLogix Safety 9324-RLDGLXE ⁽⁶⁾ | Upload/download and view | NA | NA | Upload/download Available separately | Upload/download Available separately | Full support | Full support |
| Highly integrated motion | Upload/download and view | Upload/download | Full support | Full support | Full support | Full support | Full support |
| Graphical trending | Full support | Full support ⁽⁷⁾ | Full support ⁽⁷⁾ | Full support | Full support | Full support | Full support |
| DriveExecutive Lite 9303-4DTE01ENE | Available separately | Available separately | Available separately | Included | Included | Included | Included |
| PIDE autotune 9323-ATUNEENE ⁽⁸⁾ | Available separately | Available separately | Available separately | Available separately | Available separately | Included | Included |
| Advanced Process Control instructions 9324-RLDAPCENE 9324-RLDAPCLENE ⁽⁹⁾ | Upload/download and view | Available separately | Available separately | Available separately | Available separately | Available separately | Available separately |
| Routine source protection | Included | Included | Included | Included | Included | Included | Included |
| RSLogix 5000 project compare | Included | Included | Included | Included | Included | Included | Included |

⁽¹⁾ As of RSLogix 5000 programming software, version 16. The software is designed to grab the highest functionality license first. For example, if Standard, Full and Professional Concurrent licenses are available on the FactoryTalk Activation server, RSLogix 5000 software will grab the highest functionality license first.

Select a ControlLogix System

- (2) Service Edition supports controllers with firmware revision 12 and later.
- (3) Full Edition supports controllers with firmware revision 10 and later.
- (4) A multiple language editor package is available as 9324-RLDMLPE. It contains the function block, sequential function chart, and structured text editors.
- (5) The Structured Text editor option (9324-RLDSTXE) is required to program SFC actions in structured text.
- (6) As of RSLogix 5000 programming software, version 16.
- (7) As of RSLogix 5000 programming software, version 15.
- (8) PIDE Autotune is not supported on 1769-L23x controllers.
- (9) Select 9324-RLDAPCENE for a design license for software and a runtime license for one controller. Select 9324-RLDAPCENE for only a runtime license for one controller (for pay to deploy).

RSLogix 5000 Integration with Other Applications

| Available Features | Service Edition 9324-RLD000xxE | Mini Edition 9324-RLD200xxE | Lite Edition 9324-RLD250xxE | Standard Edition: Node Locked 9324-RLD300xxE Concurrent License ⁽¹⁾ 9324-RLD300xxF | Standard/ NetWorx Edition 9324-RLD300NXxxE | Full Edition: Node Locked 9324-RLD600xxE Concurrent License ⁽¹⁾ 9324-RLD600xxF | Professional Edition: Node Locked: 9324-RLD700NXxxE Concurrent License ⁽¹⁾ 9324-RLD700NXxxF |
|------------------------------------------------------------------------------------------|-----------------------------------|--------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| RSInx Classic software | Lite included | Lite included | Lite included | Lite included | Lite included | Lite included | Lite included |
| RSNetWorx ControlNet, RSNetWorx DeviceNet, RSNetWorx EtherNet/IP software ⁽²⁾ | Available separately | Available separately | Available separately | Available separately | Included | Available separately | Included |
| FactoryTalk AssetCentre audit support | Included | Included | Included | Included | Included | Included | Included |
| FuzzyDesigner 9324-RLDFZYENE ⁽³⁾ | NA | Available separately | Available separately | Available separately | Available separately | Available separately | Available separately |
| RSLogix Emulate 5000 9310-WED200ENE ⁽⁴⁾ | Available separately | NA | NA | Available separately | Available separately | Available separately | Included |
| FactoryTalk security server ⁽⁵⁾ | Included | Included | Included | Included | Included | Included | Included |
| Security server emulator ⁽⁵⁾ | Included | Included | Included | Included | Included | Included | Included |
| RSLogix Architect 9326-LGXARCHENE ⁽⁶⁾ | Available separately | Available separately | Available separately | Available separately | Available separately | Available separately | Included |
| FactoryTalk View SE demo (50 tags/2 hours) | Available separately | Available separately | Available separately | Available separately | Available separately | Available separately | Included |

- (1) As of RSLogix 5000 programming software, version 16. The software is designed to grab the highest functionality license first. For example, if Standard, Full and Professional Concurrent licenses are available on the FactoryTalk Activation server, RSLogix 5000 software will grab the highest functionality license first.
- (2) RSNetWorx for ControlNet software is 9357-CNETL3. RSNetWorx for DeviceNet software is 9357-DNETL3. RSNetWorx for EtherNet/IP software is 9357-ENETL3. They are available together as 9357-ANETL3.
- (3) As of RSLogix 5000 programming software, version 16.
- (4) RSLogix Emulate 5000 software does not support Microsoft Windows Vista at this time.

- ⁽⁵⁾ FactoryTalk AP install required - included on disk.
- ⁽⁶⁾ As of RSLogix 5000 programming software, version 15.

Notes:

Rockwell Automation Support

Rockwell Automation provides technical information on the Web to assist you in using its products. At <http://support.rockwellautomation.com>, you can find technical manuals, a knowledge base of FAQs, technical and application notes, sample code and links to software service packs, and a MySupport feature that you can customize to make the best use of these tools.

For an additional level of technical phone support for installation, configuration, and troubleshooting, we offer TechConnect support programs. For more information, contact your local distributor or Rockwell Automation representative, or visit <http://support.rockwellautomation.com>.

Installation Assistance

If you experience a problem within the first 24 hours of installation, please review the information that's contained in this manual. You can also contact a special Customer Support number for initial help in getting your product up and running.

| | |
|-----------------------|------------------------------------------------------------------------------------------------|
| United States | 1.440.646.3434 Monday – Friday, 8am – 5pm EST |
| Outside United States | Please contact your local Rockwell Automation representative for any technical support issues. |

New Product Satisfaction Return

Rockwell Automation tests all of its products to ensure that they are fully operational when shipped from the manufacturing facility. However, if your product is not functioning and needs to be returned, follow these procedures.

| | |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| United States | Contact your distributor. You must provide a Customer Support case number (call the phone number above to obtain one) to your distributor in order to complete the return process. |
| Outside United States | Please contact your local Rockwell Automation representative for the return procedure. |

Allen-Bradley, Rockwell Automation, ControlLogix, CompactLogix, FactoryTalk, GuardLogix, NetLinx, PanelView, RSLinx, RSLogix 5000, RSLogix Emulate 5000, RSNetWorx, SERCOS, Ultra3000, Ultra5000, and TechConnect are trademarks of Rockwell Automation, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation, Vorstlaan/Boulevard du Souverain 36, 1170 Brussels, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 1756-SG001M-EN-P - May 2009

Supersedes Publication 1756-SG001L-EN-P - March 2009

Copyright © 2009 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.