


## VersaPoint I/O Module

### Analog Out 16 Bit Voltage 1 Channel IC220ALG321

GFK-1908

April2001

Module IC220ALG321 is used to output analog voltage signals. The signals are available with a 16 bit resolution.

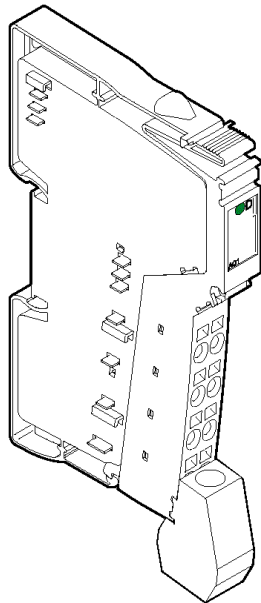

#### **Module with the I/O Terminal Strip plugged in**

Module IC220ALG321 requires one (1) I/O Terminal Strip, IC220TBK061, ordered separately. See the ordering information below.

#### **Features**

- One analog signal output to connect voltage outputs
- Actuator connection (using 2-wire technology and shield connection)
- Voltage range: 0V to 10V
- Process data update including conversion time of the digital/analog converter < 1 ms

#### **Ordering Information**

IC220ALG321    Analog Out 16 Bit Voltage 1 Channel  
 IC220TBK061    I/O Terminal Strip with Shield. Quantity 5

#### **Module Specifications**

Housing dimensions (width x height x depth)	12.2mm x 120mm x 71.5mm (0.49in. x 4.8in. x 2.86in.)
Connection style	2-wire technology
Operating temperature	-25°C to +55°C (-13°F to +131°F)
Storage temperature	-25°C to +85°C (-13°F to +185°F)
Operating humidity	75% on average, 85% occasionally. Take appropriate measures against increased humidity (> 85%).
Storage humidity	75% on average
Degree of protection	IP 20 according to IEC 60529
Class of protection	Class 3 according to VDE 0106, IEC 60536

#### **Power Consumption**

Communications power UL	7.5V
Current consumption from local bus UL	Approx. 30mA, typical; 40mA, maximum
I/O supply voltage UANA	24VDC
Current consumption UANA	15mA, typical; 20mA, maximum
Total power consumption	Approximately 0.59W, typical

**Analog Out 16 Bit Voltage 1 Channel  
IC220ALG321**

**Installation Instruction**

High current flowing through the segment and main power busses raises the temperature of the components within the module. To keep the current flowing through the power busses of the analog modules as low as possible, **a separate main circuit should be used for analog modules**. If analog modules must be used in a main circuit together with other modules place the analog modules to the right of the standard modules, at the end of the main circuit.


**Connections**

Connect actuators using shielded, twisted-pair cables. Connect one end of the shielding to protective earth ground (PE). At the module, fold the outer cable sheath back and connect the shield to the module via the shield connector clamp. The clamp connects the shield directly to FE (functional earth ground) on the module side.

When using cables longer than 10 m (32.8 ft.) in environments with heavy noise, connect the shield through an RC element to the FE potential of the actuator. Typically, the capacitor C should be rated between 1 and 15nF. The resistor R should be at least 10MΩ .

**Connection Example**


The following diagram shows the connection schematically (without shield connector).

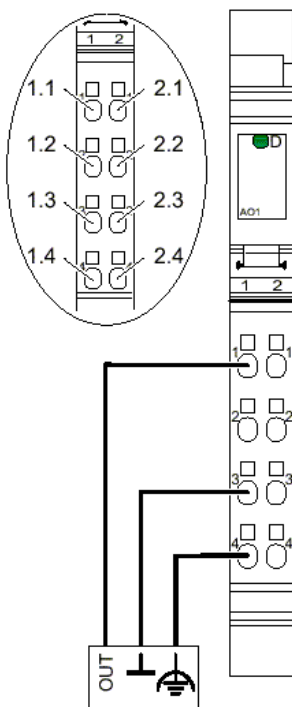


Terminal	Signal	Assignment
1.1	U	Voltage output 0V to 10V
2.1	--	Not used
1.2, 2.2	--	Not used
1.3, 2.3	GND	Ground
1.4, 2.4	Shield	Shield connection







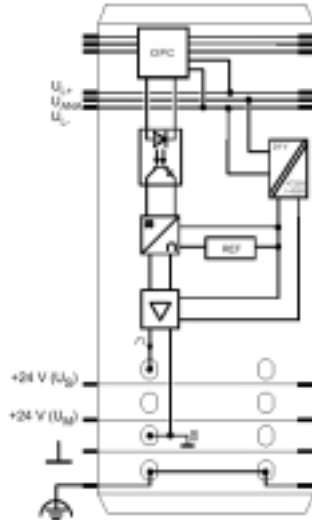

LED	Color	Meaning
D	Green	Bus diagnostics

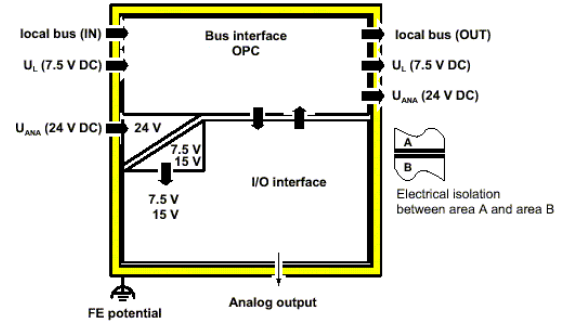Internal Circuit Diagram



Electrical Isolation



-  Protocol chip (bus logic including voltage conditioning)
-  Optocoupler
-  DC/DC converter with electrical isolation
-  Reference voltage
-  Amplifier
-  Digital/analog converter
-  Analog output
-  Analog ground, electrically isolated from ground of the voltage jumper

## VersaPoint I/O Module

### Analog Out 16 Bit Voltage 1 Channel IC220ALG321


GFK-1908

April 2001

#### Programming Data

ID code	7D hex (125 decimal )
Length code	01 hex
Input address area	0 bytes
Output address area	2 bytes
Parameter channel (PCP)	0 bytes
Register length (bus)	2 bytes

#### Process Data Output Word

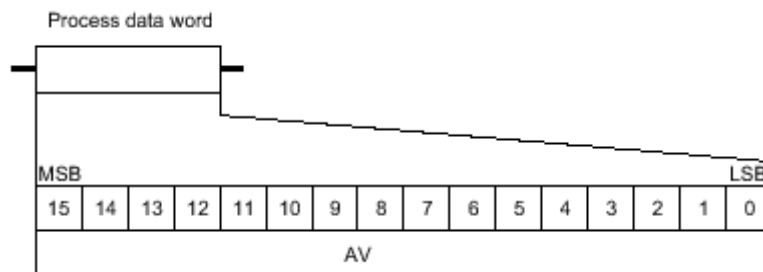

The process data output word specifies the output value in each cycle. All output values have 16 bit resolution.

**Technical Data****Deviations From Common Technical Data Indicated in the User Manual****Mechanical Demands**


Shock test according to IEC 60068-2-27

15g load for 11ms, half sinusoidal wave, three shocks in each space direction and orientation.

25g load for 6ms, half sinusoidal wave, three shocks in each space direction and orientation

**Module Derating**

The permissible ambient temperature for the module depends on the total current.

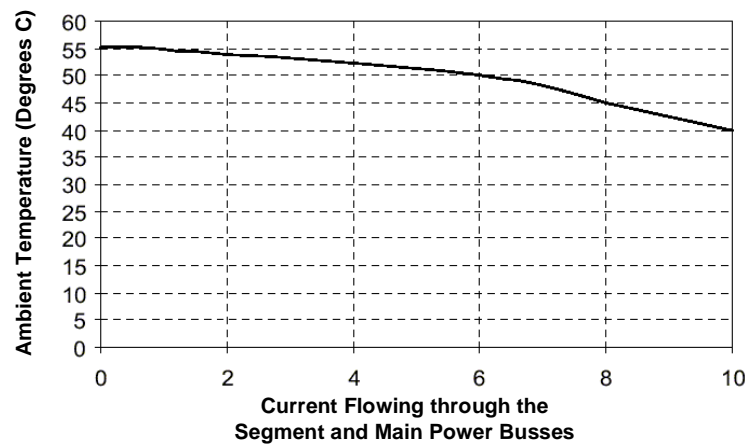**Analog Output**

Number	1
Resolution	1 count = 0.153mV
Measuring value representation	16 bits straight binary
Basic error limit in the current range	±0.05%, typical
Output load	2KΩ, minimum
Process data update including the conversion time of the digital/analog converter	< 1ms

## VersaPoint I/O Module

### Analog Out 16 Bit Voltage 1 Channel IC220ALG321

GFK-1908

April 2001

<b>Tolerance and Temperature Response of the Voltage Output (The error indications refer to the output range final Value of 10V.)</b>		
	<i>Typical</i>	<i>Maximum</i>
<i>Error at 23°C (73.4°F)</i>		
Total offset Voltage	±0.03%	±0.05%
Gain error	±0.10%	±0.15%
Differential non-linearity	±0.0012%	±0.003%
<i>Total error at 23°C (73.4°F)</i>	<i>±0.15%</i>	<i>±0.25%</i>
<i>Temperature response at -25°C to 55°C (-13°F to 131°F)</i>		
Offset Voltage drift	±10 ppm/K	±65 ppm/K
Gain drift	±30 ppm/K	±35 ppm/K
Total voltage drift (offset voltage drift + gain drift)	±40 ppm/K	±100 ppm/K
<i>Total error of the voltage output (-25°C to 55°C [-13°F to 131°F]) Offset error + gain error + linearity error + drift error</i>	<i>±0.30%</i>	<i>±0.60%</i>

<b>Additional Tolerances Influenced by Electromagnetic Fields</b>		
<i>Type of electromagnetic interference</i>	<i>Criterion</i>	<i>Typical, Relative Deviation of the Measuring Range Final Value</i>
Electromagnetic fields Field strength 10V/m acc. to IEC 61000-4-3	A	< 1%
Fast transients Supply 2 kV, output 1 kV acc. to IEC 61000-4-4	B	< 1%
Conducted interference Class 3 (test voltage 10V) acc. to IEC 61000-4-6	A	< 6%

<b>Safety Devices</b>
None

<b>Electrical Isolation</b>	
The DC/DC converter ensures electrical isolation between the logic level and the I/O area.	
<b>Common potentials</b>	
24Vmain power, 24V segment voltage, and GND have the same potential. FE (functional earth ground) is a separate potential area.	
<b>Separate system potentials consisting of bus terminal/power terminal and I/O terminal</b>	
<b>- Test distance</b>	<b>- Test Voltage</b>
7.5V supply (bus logic) / 24V supply UANA / I/O	500VAC, 50Hz, 1 min.
7.5V supply (bus logic) / 24V supply UANA / functional earth ground	500VAC, 50Hz, 1 min.
24V supply (I/O) / functional earth ground	500VAC, 50Hz, 1 min.

<b>Error Messages to the Higher-Level Control or Computer System</b>	
Breakdown or dropping of communications power UL	I/O error message to the NIU