


## VersaPoint I/O Module

### Input 24VDC Positive Logic 2 Points IC220MDL641

GFK-1901

November 2001

Module IC220MDL641 is used to accept 24VDC digital input signals.

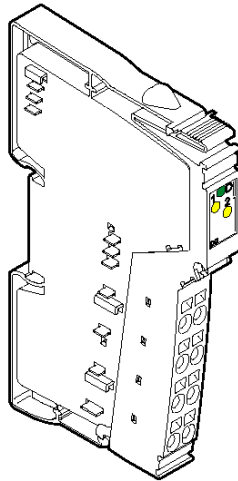

#### **Module with the I/O Terminal Strip plugged in**

Module IC220MDL641 requires one (1) I/O Terminal Strip, IC220TBK082, ordered separately. See the ordering information below.

#### **Features**

- Connections for two digital sensors
- Connection of 2-, 3-, and 4-wire sensors
- Maximum permissible load current per sensor: 250mA
- Maximum permissible load current from the module: 0.5A
- Diagnostic and status indicators

#### **Ordering Information**

IC220MDL641	Input 24VDC Positive Logic, 2 Points
IC220TBK082	I/O Terminal Strip, Spring Style, Quantity 10

<b>Module Specifications</b>	
Housing dimensions (width x height x depth)	12.2mm x 120mm x 71.5mm (0.480in. x 4.724in. x 2.795in.)
Connection style	2-, 3-, and 4-wire
Operating temperature	-25°C to +55°C (-13°F to +131°F)
Storage temperature	-25°C to +85°C (-13°F to +185°F)
Operating humidity	5% to 90%, non-condensing
Storage humidity	5% to 95%, non-condensing
Degree of protection	IP 20 according to IEC 60529
Class of protection	Class 3 according to VDE 0106, IEC 60536

<b>Power Consumption</b>	
Communications power $U_L$	7.5V
Current consumption from the local bus $U_L$	35mA, maximum
Power consumption from the local bus $U_L$	0.27W, maximum
Segment supply voltage $U_S$	24VDC (nominal value)
Nominal current consumption of $U_S$	0.5A (2 x 0.25A), maximum


# VersaPoint I/O Module

## Input 24VDC Positive Logic 2 Points IC220MDL641

GFK-1901A


November 2001

### Internal Circuit Diagram

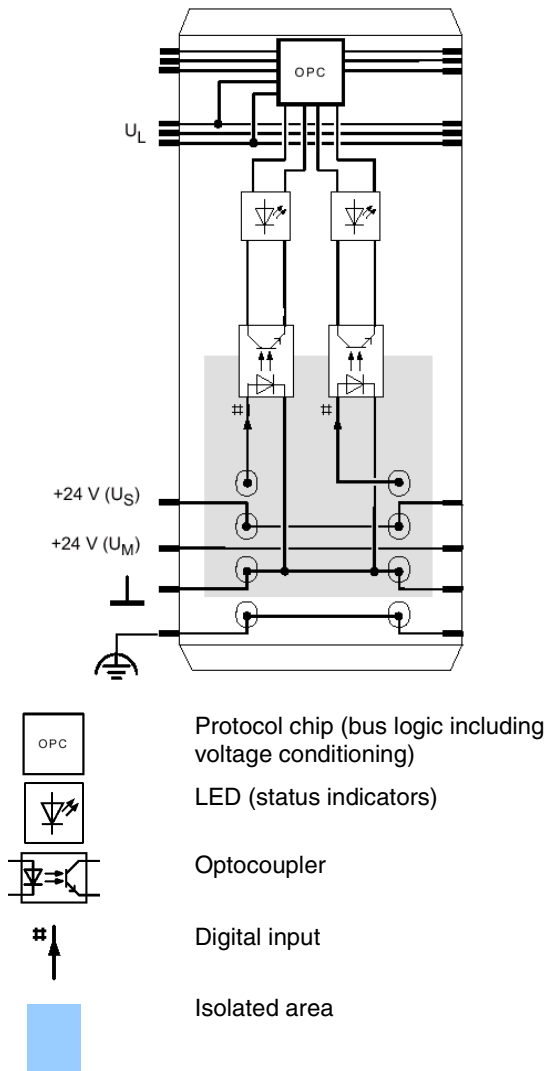

### Connection Examples

The diagram below shows example connections for a 4-wire sensor as module point 1 (terminals 1.1 to 1.4) and a 3-wire sensor as module point 2 (terminals 2.1 to 2.3).

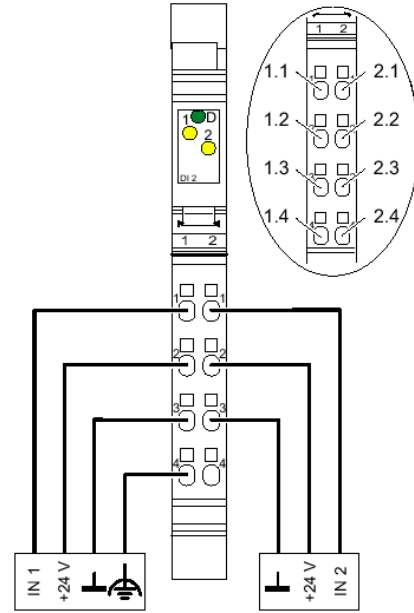

Terminals		Assignment
1.1	2.1	Signal input (IN)
1.2	2.2	Segment voltage US for 2-, 3-, and 4-wire termination
1.3	2.3	Ground contact (GND) for 3- and 4-wire termination
1.4	2.4	FE (functional earth ground) connection for 4-wire termination

	LED	Color	Meaning
	D	Green	Bus diagnostics
	1, 2	Yellow	Status indication of the inputs

**Program Data**

ID code	BE hex (190 decimal )
Length code	C2 hex
Input address area	2 bits
Output address area	0 bits (not used)
Parameter channel (PCP)	0 bits
Register length (bus)	2 bits
Error Messages	None

**Input Specifications**

<b>Discrete Inputs</b>	
Number	2
Input design	According to EN 61131-2, Type 1
Definition of switching thresholds	
Maximum low level voltage	$U_{lmax} < 5V$
Minimum high level voltage	$U_{hmin} > 15V$
Common potentials	Segment supply, ground
Nominal input voltage $U_{IN}$	24VDC
Permissible range	$-30V < U_{IN} < +30VDC$
Nominal input current $U_{IN}$	5mA
Characteristic curve of the current	Linear in the area $1V < U_{IN} < 30 V$
Delay time	None
Permissible cable length to the sensor	30m (98.4ft.) (to ensure conformance with EMC directive 89/336/EEC)
Use of AC sensors	AC sensors in the voltage range $< U_{IN}$ are limited in application. (The signal levels of the AC sensors must correspond with EN 61131-2, Type 1).

<b>Input Characteristic Curve</b>	
<i>Input voltage (V)</i>	<i>Typical input current (mA)</i>
$-30 < U_{IN} < 0.7$	0
3	0.4
6	1.0
9	1.7
12	2.3
15	3.0
18	3.7
21	4.4
24	5.0
27	5.7
30	6.4

# VersaPoint I/O Module

## Input 24VDC Positive Logic 2 Points IC220MDL641

GFK-1901A

November 2001

### Module Electrical Specifications

<b>Power Dissipation</b>	
Formula to calculate the power dissipation of the electronics	
$P_{tot} = 0.21 \text{ W} + \sum_{n=0}^2 \left[ U_{INn} \times \frac{U_{INn} - 1.8 \text{ V}}{4400 \Omega} \right]$	
With	
P <sub>tot</sub>	Total power dissipation of the terminal
n	Index of the number of set inputs n = 0 to 2
U <sub>INn</sub>	Input voltage of the input n
Power dissipation of the housing PHOU	0.6 W max. (within the permissible operating temperature)

<b>Concurrent Channel Derating</b>	
Derating	None

<b>Safety Devices</b>	
Overload in segment circuit	No
Surge voltage	Protective circuits of the power terminal
Polarity reversal	Protective circuits of the power terminal

<b>Electrical Isolation</b>
To provide electrical isolation between the logic level and the I/O area it is necessary to supply the bus module and the discrete input module using separate power supply units. Interconnection of the 24V power supplies is not allowed. (For detailed information, refer to the user manual.)

<b>Common potentials</b>	
24V main power, 24V segment voltage, and GND have the same potential. FE (functional earth ground) is a separate potential.	
<b>Separate system potentials consisting of bus module/power terminal and I/O module</b>	
Test distance	Test voltage
5V supply incoming remote bus / 7.5V supply (bus logic)	500VAC, 50Hz, 1 min.
5V supply outgoing remote bus / 7.5V supply (bus logic)	500VAC, 50Hz, 1 min.
7.5V supply (bus logic) / 24V supply (I/O)	500VAC, 50Hz, 1 min.
24V supply (I/O) / functional earth ground	500VAC, 50Hz, 1 min.